

PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau



133


INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification ⁶ : H04Q 7/22		A1	(11) International Publication Number: WO 99/17567
			(43) International Publication Date: 8 April 1999 (08.04.99)
(21) International Application Number: PCT/SE98/01698 (22) International Filing Date: 22 September 1998 (22.09.98) (30) Priority Data: 08/939,590 29 September 1997 (29.09.97) US (71) Applicant: TELEFONAKTIEBOLAGET LM ERICSSON (publ) [SE/SE]; S-126 25 Stockholm (SE). (72) Inventor: NGUYEN, Thien; 3772 Carlton, Montreal, Quebec H3S 1M3 (CA). (74) Agent: ERICSSON RADIO SYSTEMS AB; Common Patent Department, S-164 80 Stockholm (SE).		(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, GH, GM, HR, HU, ID, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, SL, TJ, TM, TR, TT, UA, UG, UZ, VN, YU, ZW, ARIPO patent (GH, GM, KE, LS, MW, SD, SZ, UG, ZW), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, CY, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, GW, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: METHOD AND SYSTEM FOR AUTOMATICALLY CONNECTING A CALL AT A SELECTED TIME IN A RADIO TELECOMMUNICATIONS NETWORK

(57) Abstract

A method and system for automatically setting up a call in a radio telecommunications network (1). The system includes a first mobile switching center (MSC) (5) servicing and controlling an area where an originating MS (3) is located and a home location register (HLR) (9) associated with the first MSC. The originating MS (3) sends data which includes the selected time and a destination number of a terminating party. Within the HLR (9) is service logic (11) which determines when the selected time has arrived and initiates the call. Upon determining that the originating MS (3) is idle and available, the HLR (9) establishes a voice channel between the first MSC (5) and the originating MS. Additionally, the HLR establishes a voice channel (54) between the terminating party (17) and a second MSC (13) if the terminating party is a mobile station. The invention also includes means (7) to record a message for delivery at the selected time to the originating party. Additionally, the terminating party may be a telephone in the Public Switched Telephone Network (PSTN).

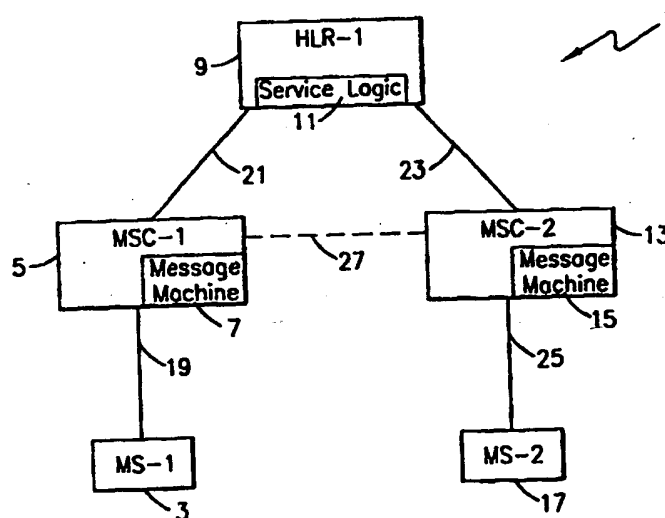

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AL	Albania	ES	Spain	LS	Lesotho	SI	Slovenia
AM	Armenia	FI	Finland	LT	Lithuania	SK	Slovakia
AT	Austria	FR	France	LU	Luxembourg	SN	Senegal
AU	Australia	GA	Gabon	LV	Latvia	SZ	Swaziland
AZ	Azerbaijan	GB	United Kingdom	MC	Monaco	TD	Chad
BA	Bosnia and Herzegovina	GE	Georgia	MD	Republic of Moldova	TG	Togo
BB	Barbados	GH	Ghana	MG	Madagascar	TJ	Tajikistan
BE	Belgium	GN	Guinea	MK	The former Yugoslav Republic of Macedonia	TM	Turkmenistan
BF	Burkina Faso	GR	Greece	ML	Mali	TR	Turkey
BG	Bulgaria	HU	Hungary	MN	Mongolia	TT	Trinidad and Tobago
BJ	Benin	IE	Ireland	MR	Mauritania	UA	Ukraine
BR	Brazil	IL	Israel	MW	Malawi	UG	Uganda
BY	Belarus	IS	Iceland	MX	Mexico	US	United States of America
CA	Canada	IT	Italy	NE	Niger	UZ	Uzbekistan
CF	Central African Republic	JP	Japan	NL	Netherlands	VN	Viet Nam
CG	Congo	KE	Kenya	NO	Norway	YU	Yugoslavia
CH	Switzerland	KG	Kyrgyzstan	NZ	New Zealand	ZW	Zimbabwe
CI	Côte d'Ivoire	KP	Democratic People's Republic of Korea	PL	Poland		
CM	Cameroon	KR	Republic of Korea	PT	Portugal		
CN	China	KZ	Kazakhstan	RO	Romania		
CU	Cuba	LC	Saint Lucia	RU	Russian Federation		
CZ	Czech Republic	LI	Liechtenstein	SD	Sudan		
DE	Germany	LK	Sri Lanka	SE	Sweden		
DK	Denmark	LR	Liberia	SG	Singapore		
EE	Estonia						

-1-

METHOD AND SYSTEM FOR AUTOMATICALLY CONNECTING A CALL
AT A SELECTED TIME IN A RADIO TELECOMMUNICATIONS
NETWORK

5 BACKGROUND OF THE INVENTION

Technical Field of the Invention

This invention relates to radio telecommunication systems and, more particularly, to a method and system for automatically setting up a call at a selected time in a
10 radio telecommunications network.

Description of Related Art

Many people today are very busy, leading complicated and full schedules. Additionally, some people must place
15 important calls at specific times of the day. Because of the complexity of people's schedules, they require some form of reminder of their planned daily activities. Typically, activities are written down in a notebook to remind a person of specific activities at specific times.
20 However, there are several disadvantages to using a notebook to remind the person of specific activities. Although the activities are written, there is no alarm to alert the person that an impending activity is required. A person can still forget to look at the notebook, or
25 become distracted by other events and completely miss the planned activity. Additionally, the activity may involve placing a telephone call at a specific time. The notebook again cannot alert the person to place the phone call. The person must still remember to make the telephone call.

30 In addition, there is a widespread growth of radio telecommunications services providing many useful services to mobile subscribers. It would be advantageous to have

-2-

a system and method which automatically initiates calls to a specific telephone number at a predetermined time and warns the mobile subscriber of the call connection. A system and method is also needed which notifies the mobile subscriber of an impending activity. Although there are no known prior art teachings of a solution to the aforementioned deficiency and shortcoming such as that disclosed herein, prior art references that discuss subject matter that bears some relation to matters discussed herein are U.S. Patent Number 5,224,146 to Tanaka et al. (Tanaka), U.S. Patent Number 5,504,804 to Widmark et al. (Widmark), United Kingdom Patent Number GB 2,306,276 to Nam (Nam), and U.S. Patent Number 5,625,683 to Nazanin et al. (Nazanin).

Tanaka discloses a radio telephone system which includes a base unit connected to a wired telephone line and a radio telephone set connected to the base unit through a radio link which has a function of automatically calling another telephone set at intervals of a predetermined time. Tanaka does not teach or suggest a system or method for automatically placing a call at a specific time. Tanaka merely discloses a system which repeatedly calls a specific number until the other party answers the call. Tanaka does not provide for automatically calling another number at a specific time nor does Tanaka provide any alerting function to inform a person of an impending activity.

Widmark discloses a method of call routing based on a subscriber's service information stored in a home location register (HLR) in a radio telecommunications network. The subscriber makes a call to another person (called the B-party) using a short number service. Short number service enables the subscriber to use a short

-3-

number to call the B-party roaming within the radio telecommunications network. Widmark does not teach or suggest a system or method for automatically placing a call to another party at a specific time, nor does Widmark
5 disclose an alerting function to inform the subscriber of an impending activity.

Nam discloses a method for automatically placing a call which is implemented within a mobile telephone. The user of the mobile telephone must press a communication reservation registering key on the mobile telephone and
10 then enter the telephone number of the person to whom he wishes to speak and the time at which he wishes to speak. The telephone number and time are displayed and stored in a memory in the mobile telephone. A control unit located
15 within the mobile telephone periodically checks the memory to see if a communication reservation has been made. If a communication reservation has been made, a timer within the mobile telephone determines if the reserved time has arrived. If the reserved time has arrived, the mobile
20 telephone automatically places a call to the reserved number. However, Nam requires the modification or replacement of existing mobile telephones in order to perform the automatic call function. Nam does not teach or suggest a system or method for automatically placing
25 a call to another party at a specific time without extensive modifications to a user's mobile telephone.

Nazanin discloses a method of reminding a user to place a call and dialing the specified telephone number when the user desires to place the call. The user inputs
30 a specific time and telephone number into his mobile telephone. At the specified time, the mobile telephone signals the user by displaying the telephone number and emitting a noise through a speaker in the mobile

-4-

telephone. Upon viewing the displayed telephone number, the user can cancel the call or confirm placement of the call to the telephone number by pressing a key. If confirmed, the mobile telephone dials the telephone number. Nazanin requires the modification of the mobile telephone itself. Additionally, the specified telephone number is not automatically dialed without the user's confirmation at the specified time. Nazanin does not teach or suggest a system or method for automatically placing a call at a specific time without major modifications to a user's mobile telephone.

Thus, it would be a distinct advantage to have a system and method providing a warning function within a mobile station to remind a subscriber of an impending activity. Additionally, a system and method are needed which automatically initiates a call to a specific telephone number at a designated time within a radio telecommunications network without requiring extensive modifications to mobile telephones.

SUMMARY OF THE INVENTION

In one aspect, the present invention is a system in a radio telecommunications network for automatically setting up a call at a selected time between an originating mobile station (MS) and a terminating MS. The system comprises a first mobile switching center (MSC) that services and controls an area where the originating MS is located and a home location register (HLR) associated with the first MSC which includes means for storing the selected time and a destination number. The HLR also includes service logic to determine when the selected time has arrived. Additionally, the service logic initiates

-5-

the call to the destination number at the selected time.
The system also includes means for completing the call.

5 In another aspect, the invention is a system in a
radio telecommunications network for automatically
connecting a call at a selected time between an originating
MS and a terminating MS. The system comprises a first MSC
servicing and controlling an area where the originating
10 MS is located, a second MSC servicing and controlling an
area where the terminating MS is located, and a HLR
associated with the first MSC for storing the selected
time and a destination number of the terminating MS. The
HLR has service logic to determine when the selected time
has arrived. The service logic initiates the call at the
selected time. Additionally, the system includes means
15 for completing the call. The means for completing the
call includes means for setting up a first voice channel
between the originating MS and the first MSC, means for
setting up a second voice channel between the terminating
MS and the second MSC, and means for establishing a trunk
20 between the first MSC and the second MSC.

In another aspect, the present invention is a system
in a radio telecommunications network for setting up a
call at a selected time between an originating MS and a
terminating telephone in a Public Switched Telephone
25 Network (PSTN). The system comprises a MSC servicing and
controlling an area where the originating MS is located
and a gateway mobile switching center (G-MSC) for
connecting the terminating PSTN telephone to the radio
telecommunications network. The system also includes an
30 HLR associated with the MSC for storing the selected time
and a destination number of the terminating PSTN
telephone. The HLR includes service logic which
determines when the selected time has arrived and

-6-

initiates the call at the selected time. In addition, the system includes means for completing the call.

5 In still another aspect, the present invention is a method in a radio telecommunications network of automatically connecting a call at a selected time between a originating MS and a terminating party. The method begins by the originating MS sending a message with data to a first MSC specifying the selected time and a selected destination for the call to a first MSC. Next, the first
10 MSC sends the data to a HLR. The HLR then stores the selected time and destination. Next, service logic within the HLR determines when the selected time has arrived. A first voice channel is then established between the first MSC and the originating MS. Next, if the
15 terminating party is available, the originating MS is connected to the terminating party.

In another aspect, the present invention is a method in a radio telecommunications network of automatically setting up a call at a selected time between a originating
20 MS and a terminating MS. The method begins by the originating MS sending a message with data specifying the selected time and a selected destination for the call to a first MSC. Next, the first MSC sends the data to an HLR. The HLR stores the selected time and destination.
25 Next, service logic within the HLR determines when the selected time has arrived. Then, it is determined if the originating MS is busy, upon determining that the selected time has arrived. A first voice channel between the first MSC and the originating MS is established, upon
30 determining that the originating MS is idle. Next, it is determined if the terminating MS is available. The HLR then waits a specific time period before determining if the terminating MS is available. Upon determining that

-7-

the terminating party is available, a second voice channel is established between the terminating MS and a second MSC servicing an area in which the terminating MS is located. The originating MS is then connected to the terminating MS.

5 MS.

In another aspect, the present invention is a method in a radio telecommunications network of automatically setting up a call at a selected time between a originating MS and a terminating party in a PSTN. The method begins

10 by the originating MS sending a message with data to a MSC specifying the selected time and a selected destination for the call. Next, the MSC sends the data to an HLR and stores the data in the HLR. The HLR determines, through service logic within the HLR, when the selected time has

15 arrived. A first voice channel between the first MSC and the originating MS is established, upon determining that the selected time has arrived. Next, it is determined if the terminating party is available. Then, the MSC is joined to a G-MSC through a trunk, upon determining that

20 the terminating party is available. The originating MS is then connected to the terminating party.

BRIEF DESCRIPTION OF THE DRAWINGS

25 The invention will be better understood and its numerous objects and advantages will become more apparent to those skilled in the art by reference to the following drawings, in conjunction with the accompanying specification, in which:

30 FIG. 1 is a simplified block diagram illustrating the components of a telecommunications system for an originating MS (MS-1) and a terminating MS (MS-2) using

a single HLR in the preferred embodiment of the present invention;

FIG. 2 is a signaling diagram illustrating activity call service set-up according to the teachings of the present invention;

FIG. 3 is a signaling diagram illustrating the activity call service process for an originating MS (MS-1) and a terminating MS (MS-2) using a single HLR-1 according to the teachings of the present invention;

FIG. 4 is a signaling diagram illustrating the activity call service process when a terminating MS is busy or unavailable;

FIGS. 5A-5D are flow charts outlining the steps of the method of activity call service for an originating MS (MS-1) and a terminating MS (MS-2) using a single HLR-1 according to the teachings of the present invention;

FIG. 6 is a simplified block diagram illustrating the components of a telecommunications system for an originating MS (MS-1) and a terminating PSTN telephone;

FIG. 7 is a signaling diagram illustrating the activity call service process for an originating MS (MS-1) and a terminating PSTN telephone according to the teachings of the present invention;

FIGS. 8A-8D are flow charts outlining the steps of the method of activity call service for an originating mobile station (MS-1) to a PSTN telephone according to the teachings of the present invention;

FIG. 9 is a simplified block diagram illustrating the components of a telecommunications system for an originating MS (MS-1) and a terminating MS (MS-2) using different HLRs according to the teachings of the present invention;

-9-

FIG. 10 is a signaling diagram illustrating the activity call service process for an originating MS (MS-1) and a terminating MS (MS-2) using different HLRs according to the teachings of the present invention; and

5 FIGs. 11A-11E are flow charts outlining the steps of the method of activity call service for an originating MS (MS-1) and a terminating MS (MS-2) using different HLRs according to the teachings of the present invention.

10 DETAILED DESCRIPTION OF EMBODIMENTS

The present invention is a system and method of setting up a call at a selected time in a radio telecommunications network (i.e., activity call service). The present invention may set up calls under a variety of scenarios. Three exemplary scenarios are described
15 herein: (1) an originating mobile station (MS) calls a second MS serviced by one home location register (HLR); (2) an originating MS calls a Public Switched Telephone Network (PSTN) telephone; and (3) an originating MS
20 serviced by a first HLR calls a second MS serviced by a second HLR.

FIG. 1 is a simplified block diagram illustrating the components of a telecommunications system 1 for an originating MS (MS-1) and a terminating MS (MS-2) using
25 a single HLR in the preferred embodiment of the present invention. The telecommunications system 1 includes a mobile station-1 (MS-1) 3, a mobile switching center-1 (MSC-1) 5 having a message machine 7, a home location register-1 (HLR-1) 9 having service logic 11, a MSC-2 (13)
30 having a message machine 15, a MS-2 (17), and communications links 19-27. Base stations are omitted for simplicity.

-10-

The MS-1 is located in a service area controlled by the MSC-1. The MSC-1 provides all of the controlling and switching functions for the MS-1. The MS-2 is located in a service area controlled by the MSC-2. The MSC-2 provides all of the controlling and switching functions for the MS-2. Associated with the MS-1 and the MS-2 is the HLR-1 which contains a database with the subscriber class and location of the mobile stations which it serves. Both MS-1 and MS-2 are serviced by the same HLR, HLR-1. Additionally, the HLR-1 has service logic 11 for determining and initiating a specific activity at a specific time. The service logic 11 also enables the HLR-1 to initiate a call set-up between the MS-1 and the MS-2. Integrated into every mobile switching center is a message machine for the storage of messages and the production of announcements to the mobile stations within its service area.

FIG. 2 is a signaling diagram illustrating activity call service set-up according to the teachings of the present invention. Referring to FIGs. 1 and 2, MS-1 initiates a service call by sending an Activity Data Information message 31 containing the date, time, destination number and voice message (if required) to the MSC-1. For example, the mobile subscriber may input #ZZ*DDMMYY*HHMMSS*NNNNNNN, where ZZ is the request code for activity call service, DDMMYY is the date, HHMMSS is the time of day for which the service is requested and NNNNNNN is the number where the call is to be connected. Additionally, the mobile subscriber may send a message to his own mobile station, thereby providing a message to himself at a selected time (e.g., a reminder of an impending activity). For example, the mobile subscriber may input #XX*DDMMYY*HHMMSS*NNNNNNN, where XX is the

-11-

request code for activity call service whereby a message may be sent and NNNNNNN is the MS-1's own telephone number. In this embodiment, after inputting the code, the MS-1 is prompted to record a voice message.

5 A radio telecommunications network operator may offer the activity call service to all mobile stations or provide the service optionally to individual mobile stations paying for the activity call service. If the service is provided to all mobile stations, there is no
10 need to verify that the requesting mobile station has the service. However, if the network operator provides the activity call service as a paid option, upon receipt of the Activity Data Information message 31, the MSC-1 performs a check to verify that the MS-1 has activity call
15 service (i.e., the mobile subscriber has subscribed to the activity call service). If the MS-1 does not subscribe to activity call service, the request for the activity call service is rejected. However, if the MS-1 does subscribe to activity call service, the MSC-1 sends a
20 Feature Request message 33 containing the date, time and destination number to the HLR-1. The HLR-1 then stores the information in the subscriber record for the MS-1. If a voice message has been sent by the MS-1, the voice message is stored within the message machine 7 located
25 within the MSC 5. Once the HLR-1 successfully receives the Feature Request message 33, the HLR-1 sends an Acknowledgment message 35 to the MSC-1 acknowledging receipt of the Feature Request message 33. The MSC-1 then sends a Feature Confirmation message 37 to the MS-1
30 indicating that the selected activity service is active. The Feature Confirmation message 37 may be a verbal message or an aural indication produced and sent from the message machine 7.

-12-

Once the activity call service set-up is complete, the system initiates the requested call at the designated time. FIG. 3 is a signaling diagram illustrating the activity call service process for an originating MS (MS-1) 3 and a terminating MS (MS-2) 17 using a single HLR-1 (9) according to the teachings of the present invention. Referring to FIGs. 1, 2, and 3, the activity call process will be explained. When the service logic 11 within the HLR-1 has determined that the selected time (as inputted by the originating MS (MS-1) in the Activity Data Information message 31) has arrived, the service logic 11 prompts the HLR-1 to send a Route Request (ROUTREQ) Invoke message 41 to the MSC-1. The ROUTREQ Invoke message 41 contains an activity service indicator, prompting the MSC-1 to generate a special ringing at call connection. The MSC-1 then sends a Page 43 to the MS-1 to verify the availability of the MS-1. The MS-1 sends a Page Response message 45 acknowledging receipt of the Page 43 and the status of the MS-1 to the MSC-1. Once, the MSC-1 receives the Page Response message 45, the MS-1 is connected to a voice channel 46 with the MSC-1, if the MS-1 is available. Upon establishing the voice channel 46, the MSC-1 sends a ROUTREQ Return Result message 47 to the HLR-1 indicating the availability of the MS-1.

If the MS-1 is busy, the HLR-1 waits until the MS-1 is idle and then starts the process again. If the MS-1 cannot be found (i.e., no page response is received), the activity call service may be attempted again after a specified time, depending on the level of activity call service to which the MS-1 subscribes. The network operator may offer different optional levels for the activity call service. For example, if the MS-1 subscribes to activity call service level 1, the activity

-13-

call process may be initiated again after, for example, 10 minutes. If the MS-1 subscribes to activity call service level 2, the activity call process may be initiated twice every 10 minutes. After a specific number of repetitions determined by the radio telecommunications network operator, the call is terminated for that activity call request if the MS-1 still cannot be found.

Once the HLR-1 receives the ROUTREQ Return Result message 47 indicating the available status of the MS-1, the HLR-1 sends a second ROUTREQ Invoke message 49 to the MSC-2 to verify the availability of the MS-2. If the MS-2 is not busy, the MSC-2 then pages the MS-2 at 51. If the MS-2 is busy or cannot be found (i.e., there is no page response), a ROUTREQ Return Result message is sent to the HLR-1 with the status of MS-2. The HLR-1 then sends a message to the MS-1 indicating the status of the MS-2 via the message machine 7 within the MSC-1 5. The MS-1 is provided the option of repeating the activity call after a predetermined time period such as, for example, ten minutes, or terminating the activity call request.

If MS-2 is available, the MS-2 responds to the page by sending a Page Response message 53 to the MSC-2 indicating its availability. Once the MSC-2 receives the Page Response message 53, the MSC-2 sets up a voice channel 54 with the MS-2, if the MS-2 is available. Then, the MSC-2 sends a ROUTREQ Return Result message 55 containing a roaming routing number, such as a TLDN, to the HLR-1 indicating the location and availability status of the MS-2. The HLR-1 then sends an Initiation message 57 containing the Roaming Routing Number to the MSC-1. The Initiation message 57 also contains an order to the MSC-1 to connect a voice trunk 59 with the MSC-2. Additionally, if a voice message has been recorded by MS-

-14-

1, the Initiation message 57 will instruct the MSC-1 to deliver the recorded message to the MS-1 if the MS-1 is calling itself, or to MS-2 if MS-1 is calling another MS.

5 Upon receipt of the Initiation message 57, the MSC-1 delivers the call to the MSC-2 by establishing the trunk 59. At call connection, MSC-1 sends MS-1 a distinctive ring 58 to distinguish the call from a regular call. The MS-2 receives a normal ring 60 alerting the MS-2 of an incoming call. Once the call is connected, the data stored
10 for the requested activity call service is deleted from the HLR-1.

FIG. 4 is a signaling diagram illustrating the activity call service process when a terminating MS is busy or unavailable. If the MS-2 is unavailable (e.g.,
15 mobile telephone is not turned on) or busy, the ROUTREQ Return Result message 55 (FIG. 3) indicates the status to the HLR-1. The HLR-1 then sends an Initiation Message 61 to the MSC-1 indicating the busy or unavailable status of the MS-2. The MSC-1, through the message machine 7, sends
20 an announcement 63 to the MS-1. The announcement 63 indicates that the MS-1 may continue the activity service call after a selected time (e.g., 10 minutes) or terminate the activity service call. The MS-1 indicates which option is chosen by sending a Flash with Info message 65
25 to the MSC-1 containing an order to continue the activity service call or stop the activity service call request. The MSC-1 forwards the order in a Feature Request message 67 to the HLR-1. The HLR-1 responds by sending a Feature Request Acknowledgment message 69 to the MSC-1. The MSC-1
30 then sends a Flash with Info Acknowledgment message 71 to the MS-1.

FIGs. 5A-5D are flow charts outlining the steps of the method of activity call service for an originating MS

-15-

(MS-1) 3 and a terminating MS (MS-2) 17 using a single HLR-1 (9) according to the teachings of the present invention. Referring to FIGs. 1, 2, 3, 4, and 5A-5D, the method will now be described. In FIG. 5A, the method
5 begins at step 81, by a mobile subscriber inputting activity data (as described in FIG. 2) into the MS-1.

At step 83, the MS-1 sends an Activity Data Information message containing the date, time, destination number and voice message (if required) to the MSC-1. In
10 step 85, in the situation where the network operator offers the service as a paid option, upon receipt of the Activity Data Information message, the MSC-1 determines if the MS-1 subscribes to activity call service. If the MS-1 does not subscribe to activity call service, the
15 method moves to step 87 where the request for the activity call service is rejected. However, if the MS-1 does subscribe to activity call service, the method moves from step 85 to step 89 where the MSC-1 prompts the MS-1 to record a message. In step 90, a verbal message may
20 optionally be sent to the MSC-1. Next, in step 91, the MSC-1 stores the recorded message, if any, in the message machine 7. Then in step 93, the MSC-1 sends a Feature Request message containing the date, time, and destination number to the HLR-1. In step 95, the HLR-1 stores the
25 information in the MS-1's subscriber record. Then, in step 97, the HLR-1 sends a Feature Request Acknowledgment message to the MSC-1.

The process then continues in FIG. 5B. In step 99, the MSC-1 then sends a Feature Confirmation message to the
30 MS-1 indicating that the selected activity call service is active. The Feature Confirmation message may be a verbal message or an aural indication produced and sent from the message machine 7.

-16-

In step 101, the service logic 11 in the HLR-1 (FIG. 1) determines when the selected time, as input by the MS-1 in the Activity Data Information message, has arrived. In step 103, the HLR-1 verifies the availability of the MS-1 by sending a ROUTREQ Invoke message to the MSC-1. In step 105, if the MS-1 is not busy, the MSC-1 sends a Page to the MS-1. In step 107, if the MS-1 is available, the MS-1 responds by sending a Page Response message to the MSC-1. Next in step 109, the MSC-1 sets up a voice channel with the MS-1, if the MS-1 is available. In step 111, the MSC-1 then sends a ROUTREQ Return Result message to the HLR-1, indicating the availability of MS-1 and a routing number such as a TLDN.

Next, in step 113, it is determined in the HLR-1 whether the MS-1 is available or unavailable (i.e., busy or power off). If it is determined that the MS-1 is not available, the method moves from step 113 to step 114, where the HLR-1 waits a specified amount of time, depending on the level of activity call service to which the MS-1 subscribes. Then, the method moves from step 114 to step 103 where the process begins again.

The process then continues in FIG. 5C. If it is determined at step 113 that the MS-1 is available, the method moves from step 113 to step 115 where the HLR-1 determines the availability of MS-2. This is done by the HLR-1 sending a ROUTREQ Invoke message to the MSC-2. Next, in step 117, if the MS-2 is not busy, the MSC-2 sends a Page to the MS-2. In step 119, if the MS-2 is available, the MS-2 responds to the Page by sending a Page Response to the MSC-2 indicating the availability of MS-2. In step 121, the MSC-2 sets up a voice channel between the MSC-2 and the MS-2, if the MS-2 is available. Next, in step 123, the MSC-2 sends a ROUTREQ Return Result message

-17-

containing a roaming routing number, such as a TLDN, to the HLR-1 indicating the routing number and status of the MS-2. In step 125, the HLR-1 determines the status of MS-2 (i.e., whether MS-2 is available).

5 If the HLR-1 determines that the MS-2 is not available, the method moves to step 127 where an Initiation message, containing the status of MS-2 (e.g., busy or no response), is sent from the HLR-1 to the MSC-1. Next, in step 129, an announcement is sent from MSC-1, 10 utilizing the message machine 7 (FIG.1), to the MS-1 indicating the non-availability of the MS-2. In the announcement, the MS-1 may be given the option of repeating the activity call service after a predetermined time period or stopping the activity call request. The 15 MS-1 chooses to "continue" the activity call service request or to "terminate" the request. In step 131, the MS-1 subscriber determines to continue or stop by inputting a code, such as "1" for option 1 or "2" for option 2. Then, in step 133, the MS-1 sends a Flash with Info 20 message to the MSC-1 containing the chosen option.

In step 135, the MSC-1 sends a Feature Request message, with the continue or stop order, to the HLR-1. In step 137, the HLR-1 sends a Feature Request Acknowledgment to the MSC-1, indicating receipt of the 25 Feature Request message. Next, in step 139, the MSC-1 sends a Flash with Info Acknowledgment message to the MS-1. Next, in step 141, the HLR-1 determines if the MS-1 wants to continue or terminate the activity call request. If the MS-1 is stopping the request, the HLR orders the 30 MSC-1 to stop service at step 141 and the activity service request is rejected at step 143. However, if the MS-1 chooses to continue, the method moves from step 141 to step 145 where the HLR-1 waits the predetermined time

-18-

period and then initiates the activity service call request again. Then, after the time period has passed, the method returns to step 103 (FIG. 5B).

5 In step 125, if the HLR-1 determines that the MS-2 is available, the method moves from step 125 to FIG. 5D, step 146, where the HLR-1 sends an Initiation message containing the roaming routing number to the MSC-1. The Initiation message also contains an order to the MSC-1 to connect a call with the MSC-2 and deliver any recorded message to the MS-1. Then, in step 147, the call is delivered at the selected time by establishing a trunk between the MSC-1 and the MSC-2. At call alert, the MS-1 may receive a distinctive ring 148 to distinguish the call from a regular call. The MS-2 may receive a normal alert signal 149 alerting the MS-2 of an incoming call. Next, 15 in step 150, the HLR-1 deletes the activity call service data stored within the HLR-1.

FIG. 6 is a simplified block diagram illustrating the components of a telecommunications system 151 for an originating MS (MS-1) 3 and a terminating PSTN telephone 155. The telecommunications system 151 includes the MS-1, 20 the MSC-1 (5) having the message machine 7, the HLR-1 (9) having service logic 11, a gateway mobile switching (G-MSC) 153, PSTN 155, and trunks 158 and 159.

25 MS-1, MSC-1, and the HLR-1 function in exactly the same way as described in FIG. 1. However, the called party is a telephone within the PSTN 155. The G-MSC 153 provides a gateway between the radio telecommunications network 151 and the PSTN 155. The trunks 158 and 159 are the physical connections between the MSC-1, G-MSC 153, and 30 PSTN 155.

Once the activity call service set-up is complete (as described in FIG. 2), the requested call is initiated at

-19-

the designated time. FIG. 7 is a signaling diagram illustrating the activity call service process for an originating MS (MS-1) and a terminating PSTN telephone according to the teachings of the present invention. Referring to FIGs. 2, 6, and 7, the activity call process will be explained. When the service logic 11 within the HLR-1 has determined that the selected time (as inputted by the originating MS (MS-1) in the Activity Data Information message 31) has arrived, the service logic 11 prompts the HLR-1 to send a Route Request (ROUTREQ) Invoke message 161 to the MSC-1. The ROUTREQ Invoke message 161 contains an activity service indicator, prompting the MSC-1 to generate a distinctive ringing at call connection. Additionally, the ROUTREQ Invoke message 161 includes the destination number to which the call will be connected. The HLR-1 sends the destination number to the MSC-1 for analysis when the destination number is based within the PSTN 155. If the MS-1 is not busy, the MSC-1 then sends a Page 163 to the MS-1 to verify the availability of the MS-1. If the MS-1 is available, it sends a Page Response message 165 to the MSC-1. Once, the MSC-1 receives the Page Response message 165, the MS-1 is connected to a voice channel 167 with the MSC-1. Upon establishing the voice channel 167, the MSC-1 sends a ROUTREQ Return Result message 169 to the HLR-1 indicating the availability of the MS-1.

If the MS-1 is busy, the HLR-1 waits until the MS-1 is idle and then starts the process again. If the MS-1 cannot be found (i.e., no page response is received), the activity call service may be attempted again after a specified time, depending on the level of activity call service to which the MS-1 subscribes. After a specific number of repetitions determined by the radio

-20-

telecommunications network operator, the call is terminated for that activity call request.

At step 171, the MSC-1 seizes trunks 158 and 159 to the PSTN. At call connection, MSC-1 sends MS-1 a distinctive ring 172 to distinguish the call from a regular call. Once the call is connected, the data stored for the requested activity call service is deleted from the HLR-1.

If the PSTN telephone is busy, the call can not be connected and the MSC-1 sends a message to the MS-1 indicating the status of the PSTN telephone via the message machine 7 within the MSC-1. The MS-1 is provided the option of repeating the activity call after a predetermined time period such as, for example, ten minutes, or terminating the activity call request. This procedure is illustrated in steps 219 through 227 of FIG. 8C.

FIGs. 8A-8D are flow charts outlining the steps of the method of activity call service for an originating mobile station (MS-1) 3 to a PSTN telephone 155 according to the teachings of the present invention. Referring to FIGs. 2, 6, 7, and 8A-8D, the method will now be described. IN FIG. 8A, the method begins at step 181, by a mobile subscriber inputting activity data (as described in FIG. 2) into MS-1. For example, the mobile subscriber may input #ZZ*DDMMYY*HHMMSS* NNNNNNN, where ZZ is the request code for activity call service, DDMMYY is the date, HHMMSS is the time for which the service is requested, and NNNNNNN is either the number where the call is originating if the mobile subscriber is sending a message to himself or the number where the call is to be placed or the message is to be sent.

-21-

At step 183, the MS-1 sends an Activity Data Information message containing the date, time, destination number and voice message (if required) to the MSC-1. In step 185, in the situation where the network operator offers the service as a paid option, upon receipt of the Activity Data Information message, the MSC-1 determines if the MS-1 subscribes to activity call service. If the MS-1 does not subscribe to activity call service, the method moves to step 187 where the request for the activity call service is rejected. However, if the MS-1 does subscribe to activity call service, the method moves from step 185 to step 189 where the MSC-1 prompts the MS-1 to record a message. In step 190, a verbal message may optionally be sent by the MS-1 to the MSC-1. Next, in step 191, the MSC-1 stores the recorded message, if any, in the message machine 7 (FIG. 6). Then in step 193, the MSC-1 sends a Feature Request message containing the date, time and destination number to the HLR-1. In step 195, the HLR-1 stores the information in the MS-1's subscriber record. Then, in step 197, the HLR-1 sends a Feature Request Acknowledgment message to the MSC-1.

The process then continues in FIG. 8B. In step 199, the MSC-1 then sends a Feature Confirmation message to the MS-1 indicating that the selected activity call service is active. The Feature Confirmation message may be a verbal message or an aural indication produced and sent from the message machine 7.

In step 201, the service logic 11 in the HLR-1 (FIG. 6) determines when the selected time, as inputted by the MS-1 in the Activity Data Information message, has arrived. Then, in step 203, the HLR-1 verifies the availability of the MS-1 by sending a ROUTREQ Invoke message to the MSC-1. In step 205, if the MS-1 is not

-22-

busy, the MSC-1 sends a Page to the MS-1. In step 207, if the MS-1 is available, the MS-1 responds by sending a Page Response message to the MSC-1. Next in step 209, the MSC-1 sets up a voice channel with the MS-1, if the MS-1 is available. In step 211, the MSC-1 then sends a ROUTREQ Return Result message to the HLR-1, indicating the availability of MS-1 and a routing number such as a TLDN.

Next, in step 213, it is determined in the HLR-1 whether the MS-1 is available or unavailable (i.e., busy or power off). If it is determined that the MS-1 is not available, the method moves from step 213 to step 215, where the HLR-1 waits a specified amount of time, depending on the level of activity call service that the MS-1 subscribes. Then, the method moves from step 215 to step 203 where the process begins again.

If, however, the MS-1 is available at step 213, the method moves from step 213 to step 216 in FIG. 8C where the MSC-1 analyzes the destination number sent in the ROUTREQ Invoke message and determines the location of the PSTN telephone. In step 217, the MSC-1 determines that the telephone associated with the destination number is within the PSTN 155 and seizes dedicated trunks 158 and 159. Next, in step 218, MSC-1 determines if the PSTN telephone is busy. The MSC-1 knows if the PSTN telephone is busy if the call cannot be connected.

If the MSC-1 determines that the PSTN telephone is busy, the method moves to step 219 where an announcement is sent from MSC-1, utilizing the message machine 7 (FIG.6), to the MS-1 indicating the busy status of the PSTN telephone. In the announcement, the MS-1 may be given the option of repeating the activity call service after a predetermined time period or stopping the activity call request. The MS-1 subscriber chooses to "continue"

-23-

the activity call service request or to "terminate" the request. In step 220, the MS-1 determines to continue or stop by inputting a code, such as "1" for option 1 or "2" for option 2. Then, in step 221, the MS-1 sends a Flash
5 with Info message to the MSC-1 containing the chosen option.

In step 222, the MSC-1 sends a Feature Request message, with the continue or stop order, to the HLR-1. In step 223, the HLR-1 sends a Feature Request
10 Acknowledgment to the MSC-1, indicating receipt of the Feature Request message. Next, in step 224, the MSC-1 sends a Flash with Info Acknowledgment message to the MS-1. Next, in step 225, the HLR-1 determines if the MS-1
15 wants to continue or terminate the activity call request. If the MS-1 is stopping the request, the HLR orders the MSC-1 to stop service at step 225 and the activity service request is rejected at step 226. However, if the MS-1
chooses to continue, the method moves from step 225 to step 227 where the HLR-1 waits the predetermined time
20 period and then initiates the activity service call request again. Then, after the time period has passed, the method returns to step 203 (FIG. 8B).

If the MSC-1 determines that the PSTN telephone is not busy in step 218, the method then moves to FIG. 8D, step 228. In step 228, at call alert, the MS-1 may
25 receive a distinctive ring to distinguish the call from a regular call. Then, in step 229, the PSTN telephone may receive a normal alert signal alerting the PSTN telephone of an incoming call. Then, in step 230, the HLR-1 deletes
30 the activity call service data stored within the HLR-1.

FIG. 9 is a simplified block diagram illustrating the components of a telecommunications system 231 for an originating MS (MS-1) 3 and a terminating MS (MS-2) 17

-24-

using different HLRs according to the teachings of the present invention. The telecommunications system 231 includes the MS-1 located within a service area 233 of MSC-1 (5) which is associated with the HLR-1 (9), the MSC-1 having a message machine 7. The MS-2 is located within a service area 235 of MSC-2 which is associated with an HLR-2 (237), the MSC-2 having the message machine 15. The components are connected by communications links 19, 21, 241, 243, 245, and 247, as shown.

With the addition of another HLR, the MSC-1 communicates with the HLR-2 and the MSC-2 through communications links 241 and 243, respectively. The functions described for the MS-1, the MSC-1, and the HLR-1 are all the same as discussed in FIG. 1. Additionally, the activity call service set-up is the same as described in FIG. 2.

Once the activity call service set-up is complete, the system initiates the requested call at the designated time. FIG. 10 is a signaling diagram illustrating the activity call service process for an originating MS (MS-1) and a terminating MS (MS-2) using different HLRs according to the teachings of the present invention. Referring to FIGs. 2, 4, 9, and 10, the activity call process will be explained. When the service logic 11 within the HLR-1 has determined that the selected time, as inputted by the MS-1 in the Activity Data Information message 31, has arrived, the service logic 11 prompts the HLR-1 to send a Route Request (ROUTREQ) Invoke message 251 to the MSC-1. The ROUTREQ Invoke message 251 contains an activity service indicator, prompting the MSC-1 to generate a special ringing at call connection. Additionally, when the called party is serviced by a different HLR, the ROUTREQ Invoke message 251 also contains the destination number. If the

-25-

MSC is not busy, the MSC-1 then sends a Page 253 to the MS-1 to verify the availability of the MS-1. If the MS-1 is available, the MS-1 sends a Page Response message 255 acknowledging receipt of the Page 253 to the MSC-1. Once, the MSC-1 receives the Page Response message 255, the MS-1 is connected to a voice channel 257 with the MSC-1. Upon establishing the voice channel 257, the MSC-1 sends an ROUTREQ Return Result message 259 to the HLR-1.

If the MS-1 is busy, the HLR-1 waits until the MS-1 is idle before repeating the ROUTREQ Invoke message 251 to the MSC-1. If the MS-1 cannot be found, the activity call service may be attempted again after a specified time, depending on the level of activity call service to which the MS-1 subscribes. After a specific number of repetitions determined by the radio telecommunications network operator, the call is terminated for that activity call request.

Once the HLR-1 receives the ROUTREQ Return Result message 259 indicating the available status of the MS-1, the MSC-1 sends a Location Request (LOCREQ) Invoke message 261 to the HLR-2. The HLR-2 then sends a ROUTREQ Invoke message 263 to the MSC-2 to verify the availability of the MS-2. If the MS-2 is not busy, the MSC-2 then pages the MS-2 at 265. If the MS-2 is available, the MS-2 responds by sending a Page Response message 267 to the MSC-2 indicating receipt of the Page 265. Once the MSC-2 receives the Page Response message 267, the MSC-2 sets up a voice channel 269 with the MS-2. Then, the MSC-2 sends a ROUTREQ Return Result message 271 containing a roaming routing number, such as a TLDN, to the HLR-2 indicating the routing number of the MS-2. The HLR-2 then sends a LOCREQ Return Result message 273, containing the Roaming Routing Number, to the MSC-1.

-26-

Upon receipt of the LOCREQ Return Result message 273, the MSC-1 delivers the call at 275 to the MSC-2. At call connection, the MS-1 receives a distinctive ring 277 to distinguish the call from a regular call. The MS-2
5 receives a normal ring 279 alerting the MS-2 of an incoming call. Once the call is connected, the data stored for the requested activity call service is deleted from the HLR-1.

If the MS-2 is busy or cannot be found (e.g., the
10 power is off on the MS-2), the HLR-2 sends a message to the MS-1 indicating the status of the MS-2 via the message machine 7 within the MSC-1. The MS-1 is provided the option of repeating the activity call after a predetermined time period such as, for example, ten
15 minutes, or terminating the activity call request. This procedure is illustrated in steps 333 through 351 of FIG. 11D.

FIGS. 11A-11E are flow charts outlining the steps of the method of activity call service for an originating MS (MS-1) 3 and a terminating MS (MS-2) 17 using different
20 HLRs according to the teachings of the present invention. Referring to FIGs. 2, 4, 9, 10 and 11A-11E, the method will now be described. In FIG. 11A, the method begins at step 281, by a mobile subscriber inputting activity data
25 (as described in FIG. 2) into the MS-1.

At step 283, the MS-1 sends an Activity Data Information message containing the date, time, destination number and voice message (if required) to the MSC-1. In
30 step 285, in the situation where the network operator offers the service as a paid option, upon receipt of the Activity Data Information message, the MSC-1 determines if the MS-1 subscribes to activity call service. If the MS-1 does not subscribe to activity call service, the

-27-

method moves to step 287 where the request for the activity call service is rejected. However, if the MS-1 does subscribe to activity call service, the method moves from step 285 to step 289 where the MSC-1 prompts the MS-1 to record a message. In step 290, a verbal message may optionally be sent to the MSC-1. Next, in step 291, the MSC-1 stores the recorded message, if any, in the message machine 7. Then in step 293, the MSC-1 sends a Feature Request message containing the date, time, and destination number to the HLR-1. In step 295, the HLR-1 stores the information in the MS-1's subscriber record. Then, in step 297, the HLR-1 sends a Feature Request Acknowledgment message to the MSC-1.

The process then continues in FIG. 11B. In step 299, the MSC-1 then sends a Feature Confirmation message to the MS-1 indicating that the selected activity service is active. The Feature Confirmation message may be a verbal message or an aural indication produced and sent from the message machine 7.

In step 301, the service logic 11 in the HLR-1 (FIG. 9) determines when the selected time, as input by the MS-1 in the Activity Data Information message, has arrived. In step 303, the HLR-1 verifies the availability of the MS-1 by sending a ROUTREQ Invoke message to the MSC-1. In step 305, if the MS-1 is not busy, the MSC-1 sends a Page to the MS-1. In step 307, if the MS-1 is available, the MS-1 responds by sending a Page Response message to the MSC-1. Next in step 309, the MSC-1 sets up a voice channel with the MS-1, if the MS-1 is available. In step 311, the MSC-1 then sends a ROUTREQ Return Result message to the HLR-1, indicating the availability of MS-1 and a routing number such as a TLDN.

Next, in step 313, it is determined in the HLR-1

-28-

whether the MS-1 is available or unavailable (i.e., busy or power off). If it is determined that the MS-1 is not available, the method moves from step 313 to step 314, where the HLR-1 waits a specified amount of time, depending on the level of activity call service to which the MS-1 subscribes. Then, the method moves from step 314 to step 303 where the process begins again.

The process then continues in FIG. 11C. If it is determined at step 313 that the MS-1 is available, the method moves from step 313 to step 317 where the MSC-1 sends a LOCREQ Invoke message to the HLR-2. The HLR-2, in step 319, then determines the availability of MS-2. This is done by the HLR-2 sending a ROUTREQ Invoke message to the MSC-2. Next, in step 321, if the MS-2 is not busy, the MSC-2 sends a Page to the MS-2. In step 323, if the MS-2 is available, the MS-2 responds to the Page by sending a Page Response to the MSC-2 indicating the availability of MS-2. In step 325, the MSC-2 sets up a voice channel between the MSC-2 and the MS-2, if the MS-2 is available. Next, in step 327, the MSC-2 sends a ROUTREQ Return Result message containing a roaming routing number, such as a TLDN, to the HLR-2 indicating the routing number and status of the MS-2. In step 329, the HLR-2 sends a LOCREQ Return Result message to the MSC-1, indicating the routing number and availability of the MS-2. Then, in step 331, the HLR-2 determines the status of MS-2 (i.e., whether MS-2 is available).

If the HLR-2 determines that the MS-2 is not available, the method moves to FIG. 11D, step 333 where an Initiation message, containing the status of MS-2 (e.g., busy or no response), is sent from the HLR-2 to the MSC-1. Next, in step 335, an announcement is sent from MSC-1, utilizing the message machine 7 (FIG.1), to the MS-

-29-

1 indicating the non-availability of the MS-2. In the announcement, the MS-1 may be given the option of repeating the activity call service after a predetermined time period or stopping the activity call request. The
5 MS-1 chooses to "continue" the activity call service request or to "terminate" the request. In step 337, the MS-1 subscriber determines to continue or stop by inputting a code, such as "1" for option 1 or "2" for option 2. Then, in step 339, the MS-1 sends a Flash with Info
10 message to the MSC-1 containing the chosen option.

In step 341, the MSC-1 sends a Feature Request message, with the continue or stop order, to the HLR-1. In step 343, the HLR-1 sends a Feature Request Acknowledgment to the MSC-1, indicating receipt of the
15 Feature Request message. Next, in step 345, the MSC-1 sends a Flash with Info Acknowledgment message to the MS-1. Next, in step 347, the HLR-1 determines if the MS-1 wants to continue or terminate the activity call request. If the MS-1 is stopping the request, the HLR orders the
20 MSC-1 to stop service at step 347 and the activity service request is rejected at step 349. However, if the MS-1 chooses to continue, the method moves from step 347 to step 351 where the HLR-1 waits the predetermined time period and then initiates the activity service call
25 request again. Then, after the time period has passed, the method returns to step 303 (FIG. 11B).

In step 331, if the HLR-2 determines that the MS-2 is available, the method moves from step 331 to FIG. 11E, step 353, where the MSC-1 establishes a trunk with the
30 MSC-2, resulting in call delivery. At call alert, the MS-1 may receive a distinctive ring 355 to distinguish the call from a regular call. The MS-2 may receive a normal ring 357 alerting the MS-2 of an incoming call. Next, in

-30-

step 359, the HLR-1 deletes the activity call service data stored within the HLR-1.

Thus, the system and method of the invention notifies the mobile subscriber of impending activities. Additionally, the invention automatically sets up important telephone calls at selected times. Therefore, the mobile subscriber is reminded to place important telephone calls. The invention may also be used as a message reminder system which sends recorded messages to the mobile subscriber at a selected time. Overall, this system and method provides many services to a mobile subscriber by using his cellular telephone.

It is thus believed that the operation and construction of the present invention will be apparent from the foregoing description. While the method and system shown and described have been characterized as being preferred, it will be readily apparent that various changes and modifications could be made therein without departing from the spirit and scope of the invention as defined in the following claims.

-31-

WHAT IS CLAIMED IS:

1. A system in a radio telecommunications network for automatically setting up a call at a selected time between an originating mobile station (MS) and a terminating party, said system comprising:

a first mobile switching center (MSC) that services and controls an area where said originating MS is located;

a first home location register (HLR) associated with said first MSC, said HLR including:

means for storing said selected time and a destination number of said terminating party;

service logic which determines when said selected time has arrived, and initiates said call to said destination number at said selected time; and

means for completing said call.

2. The system of claim 1 wherein said means for completing said call includes means for setting up a first voice channel between said originating MS and said first MSC.

3. The system of claim 2 further comprising means for notifying said originating MS of said call.

4. The system of claim 3 wherein said means for notifying said originating MS of said call is a distinctive ringing.

5. The system of claim 4 further comprising a second MSC servicing and controlling an area where said terminating party is located and wherein said terminating party is a terminating MS.

-32-

6. The system of claim 5 wherein said means for completing said call includes means for setting up a second voice channel between said terminating MS and said second MSC and means for establishing a trunk between said first MSC and said second MSC.

7. The system of claim 5 wherein said second MSC is associated with said first HLR.

8. The system of claim 5 further comprising a second HLR associated with said second MSC for storing a routing number of said terminating MS.

9. The system of claim 4 further comprising means for determining whether said originating MS is busy and wherein said service logic initiates said call when said originating MS is idle.

10. The system of claim 9 further comprising means for determining whether said terminating MS is idle and available and wherein said service logic initiates said call when said terminating MS is idle and available.

11. The system of claim 4 wherein said first MSC includes means for storing a recorded message from said originating MS, said service logic determines when said recorded message is delivered to said originating MS, and said system further comprises means for delivering said recorded message to said originating MS.

12. The system of claim 11 wherein said means for storing said recorded message includes a message machine in said first MSC.

-33-

13. The system of claim 12 wherein said means for delivering said recorded message includes means for setting up a first voice channel between said originating MS and said first MSC.

5

14. The system of claim 13 further comprising means for notifying said originating MS of said call.

10

15. The system of claim 14 further comprising a second MSC that services and controls an area where said terminating party is located, and wherein said terminating party is a terminating MS.

15

16. The system of claim 15 wherein said means for completing said call includes means for setting up a second voice channel between said terminating MS and said second MSC, and means for establishing a trunk between said first MSC and said second MSC.

20

17. The system of claim 16 further comprising means for determining whether said terminating MS is available and wherein said service logic directs said first MSC to deliver said recorded message to said originating MS when said terminating MS is available.

25

18. The system of claim 17 further comprising a second HLR associated with said second MSC for storing a routing number of said terminating MS.

30

19. A system in a radio telecommunications network for setting up a call at a selected time between a originating mobile station (MS) and a terminating MS, said system comprising:

-34-

a first mobile switching center (MSC) servicing and controlling an area where said originating MS is located;

a second MSC servicing and controlling an area where said terminating MS is located;

5 a home location register (HLR) associated with said first MSC for storing said selected time and a destination number of said terminating party, said HLR including service logic which determines when said selected time has arrived and initiates said call at said selected time; and

10 means for completing said call, said means for completing said call including means for setting up a first voice channel between said originating MS and said first MSC, means for setting up a second voice channel between said terminating MS and said second MSC, and means
15 for establishing a trunk between said first MSC and said second MSC.

20. A system in a radio telecommunications network for setting up a call at a selected time between a
20 originating mobile station (MS) and a terminating telephone in a Public Switched Telephone Network (PSTN), said system comprising:

a mobile switching center (MSC) servicing and controlling an area where said originating MS is located;

25 a gateway mobile switching center (G-MSC) for connecting said terminating PSTN telephone to said radio telecommunications network;

a home location register (HLR) associated with said MSC for storing said selected time and a destination
30 number of said terminating party, said HLR including service logic which determines when said selected time has arrived and initiates said call at said selected time; and
means for completing said call.

-35-

21. The system of claim 20 wherein said means for completing said call includes means for setting up a voice channel between said originating MS and said first MSC.

5 22. The system of claim 21 further comprising means for notifying said originating MS of said call.

10 23. The system of claim 22 wherein said means for notifying said originating MS of said call is a distinctive ringing.

15 24. The system of claim 23 further comprising means for establishing a first trunk between said MSC and said G-MSC and means for establishing a second trunk between said G-MSC and said PSTN.

20 25. The system of claim 24 further comprising means for determining whether said originating MS is busy and wherein said service logic initiates said call when said originating MS is idle.

25 26. The system of claim 25 further comprising means for determining whether said terminating MS is available and wherein said service logic initiates said call when said terminating MS is available.

30 27. The system of claim 23 wherein said MSC stores a recorded message from said originating MS, said service logic determines when said recorded message is delivered to said originating MS, and said system further comprises means for delivering said recorded message to said originating MS.

-36-

28. A method in a radio telecommunications network of automatically setting up a call at a selected time between a originating mobile station (MS) and a terminating party, said method comprising the steps of:

5 sending a message with data from said originating MS to a first mobile switching center (MSC), said message with data specifying said selected time and a selected destination for said call;

10 sending said data from said first MSC to a home location register (HLR);

storing said data, in said HLR;

determining, by service logic within said HLR, when said selected time has arrived;

15 establishing a first voice channel between said first MSC and said originating MS, upon determining that said selected time has arrived;

determining if said terminating party is available; and

20 connecting said originating MS to said terminating party, upon determining that said terminating party is available.

29. The method of claim 28, further comprising, after the step of determining, by service logic within
25 said HLR, when said selected time has arrived, the step of notifying said originating MS of an impending call, upon determining that said selected time has arrived.

30 30. The method of claim 29 further comprising, after the step of determining, by service logic within said HLR, when said selected time has arrived, the step of determining if said originating MS is busy.

-37-

31. The method of claim 30 wherein a second MSC services an area in which said terminating party is located, and said method further comprises, after the step of determining if said terminating party is available, the
5 step of establishing a second voice channel between said second MSC and said terminating party, upon determining that said terminating party is available.

32. The method of claim 31 wherein said step of
10 connecting said originating MS to said terminating party includes establishing a trunk from said first MSC to said second MSC.

33. The method of claim 28 further comprising, after
15 the step of connecting said originating MS to said terminating party, the step of deleting said data by said HLR.

34. The method of claim 28 wherein said step of
20 sending a data message includes sending a recorded message to a first MSC, and said method further comprises:

after the step of sending, by said originating MS, a message with data specifying said selected time and a selected destination, the step of storing said recorded
25 message by said first MSC; and

after the step of determining if said terminating party is available, the step of delivering said recorded message to said originating MS.

30 35. A method in a radio telecommunications network of setting up a call at a selected time between an originating mobile station (MS) and a terminating party, said method comprising the steps of:

-38-

sending, from said originating MS to a first mobile switching center (MSC), a message specifying said selected time and a selected destination for said call;

5 sending said selected time and said selected destination from said first MSC to a home location register (HLR);

storing of said selected time and said selected destination by said HLR;

10 determining, by service logic within said HLR, when said selected time has arrived;

determining if said originating MS is busy;

establishing a first voice channel between said first MSC and said originating MS, upon determining that said originating MS is idle;

15 determining if said terminating party is available;

waiting a specific time period by said HLR, upon determining that said terminating party is not available;

determining if said terminating party is available;

20 establishing a second voice channel between a second MSC servicing an area in which said terminating party is located and said terminating party, upon determining that said terminating party is available; and

connecting said originating MS to said terminating party.

25

36. A method in a radio telecommunications network of automatically setting up a call at a selected time between a originating mobile station (MS) and a terminating party in a Public Switched Telephone Network (PSTN), said method comprising the steps of:

30

sending a message with data from said originating MS to a mobile switching center (MSC), said message with data

-39-

specifying said selected time and a selected destination for said call;

sending said data from said MSC to a home location register (HLR);

5 storing said data in said HLR;

determining, by service logic within said HLR, when said selected time has arrived;

10 establishing a first voice channel between said first MSC and said originating MS, upon determining that said selected time has arrived;

determining if said terminating party is available;

joining said MSC to a gateway mobile switching center (G-MSC) through a trunk, upon determining that said terminating party is available; and

15 connecting said originating MS to said terminating party.

20 37. A system in a telecommunications network for automatically setting up a call at a selected time between an originating party and a terminating party, said system comprising:

means for storing said selected time and a destination number of said terminating party;

25 service logic which determines when said selected time has arrived, and initiates said call to said destination number at said selected time; and

means for completing said call.

30 38. The system of claim 37 further comprising means for notifying said originating party of said call.


-40-

39. The system of claim 38 wherein said means for notifying said originating party of said call is a distinctive ringing.


5 40. The system of claim 39 further comprising means for determining whether said originating party is available and wherein said service logic initiates said call when said originating party is available.

10 41. The system of claim 40 further comprising means for storing a recorded message from said originating party, said service logic determines when said recorded message is delivered to said originating party, and said system further comprises means for delivering said
15 recorded message to said originating party.

1/21

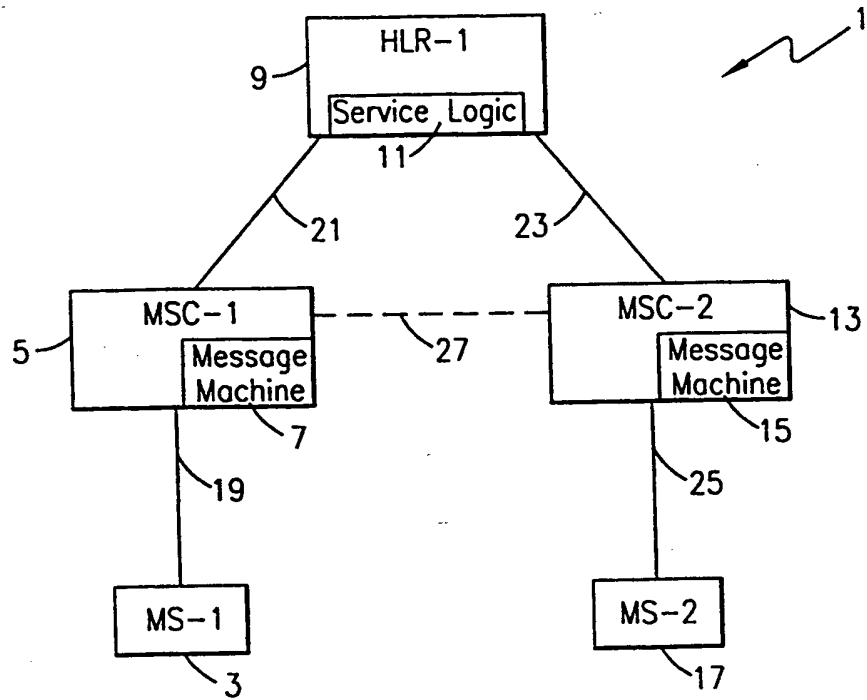**FIG. 1**

2/21

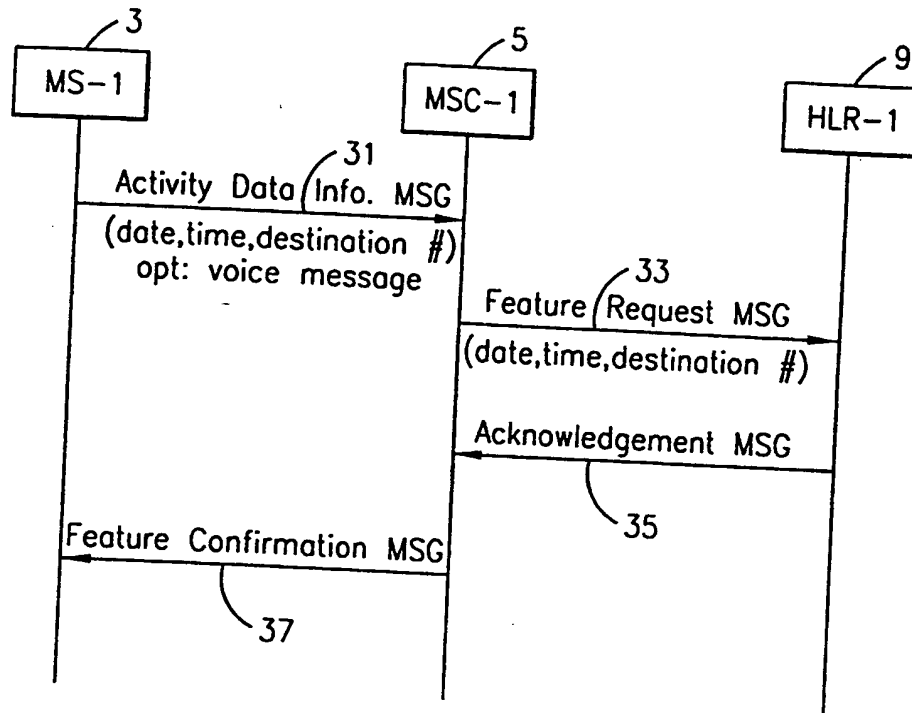**FIG. 2**

3/21

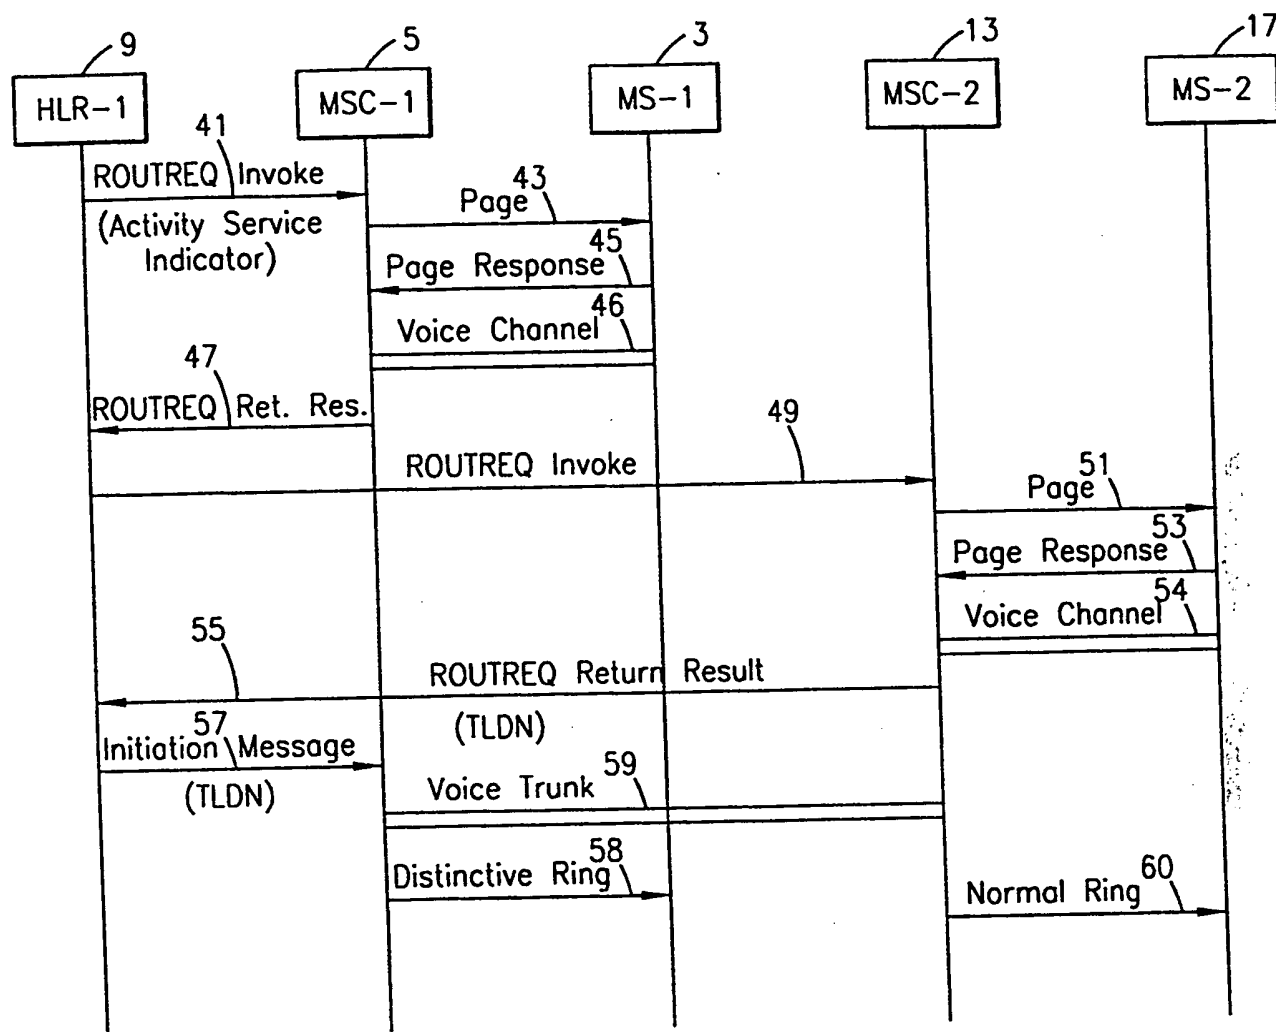
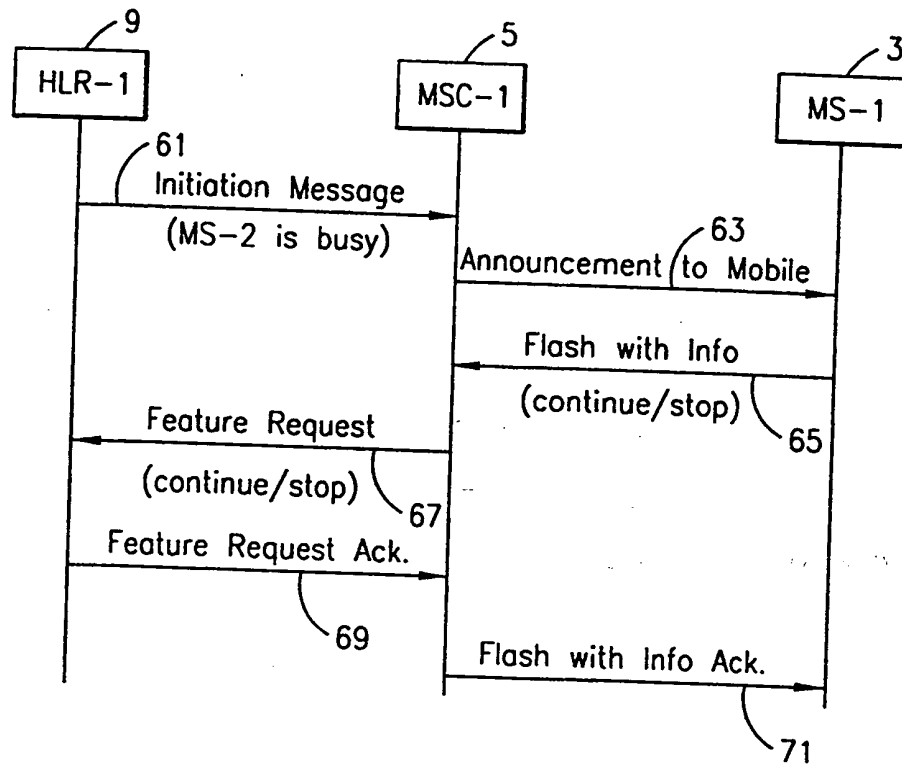


FIG. 3

4/21

**FIG. 4**

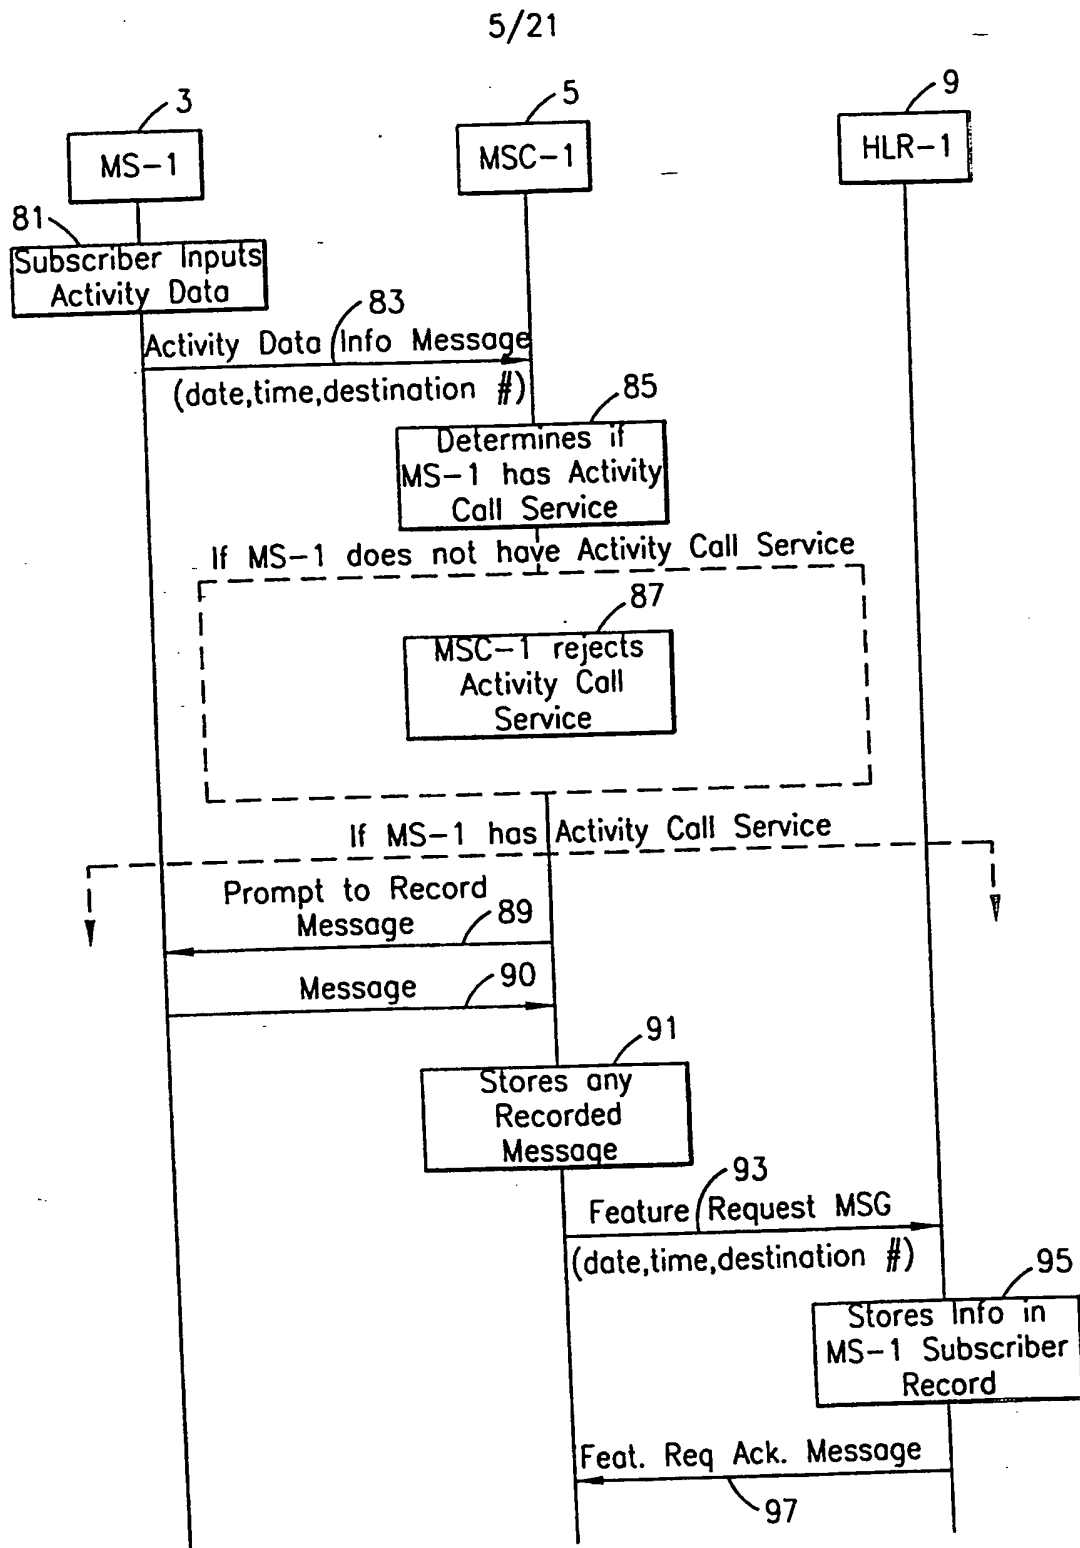


FIG. 5A

6/21

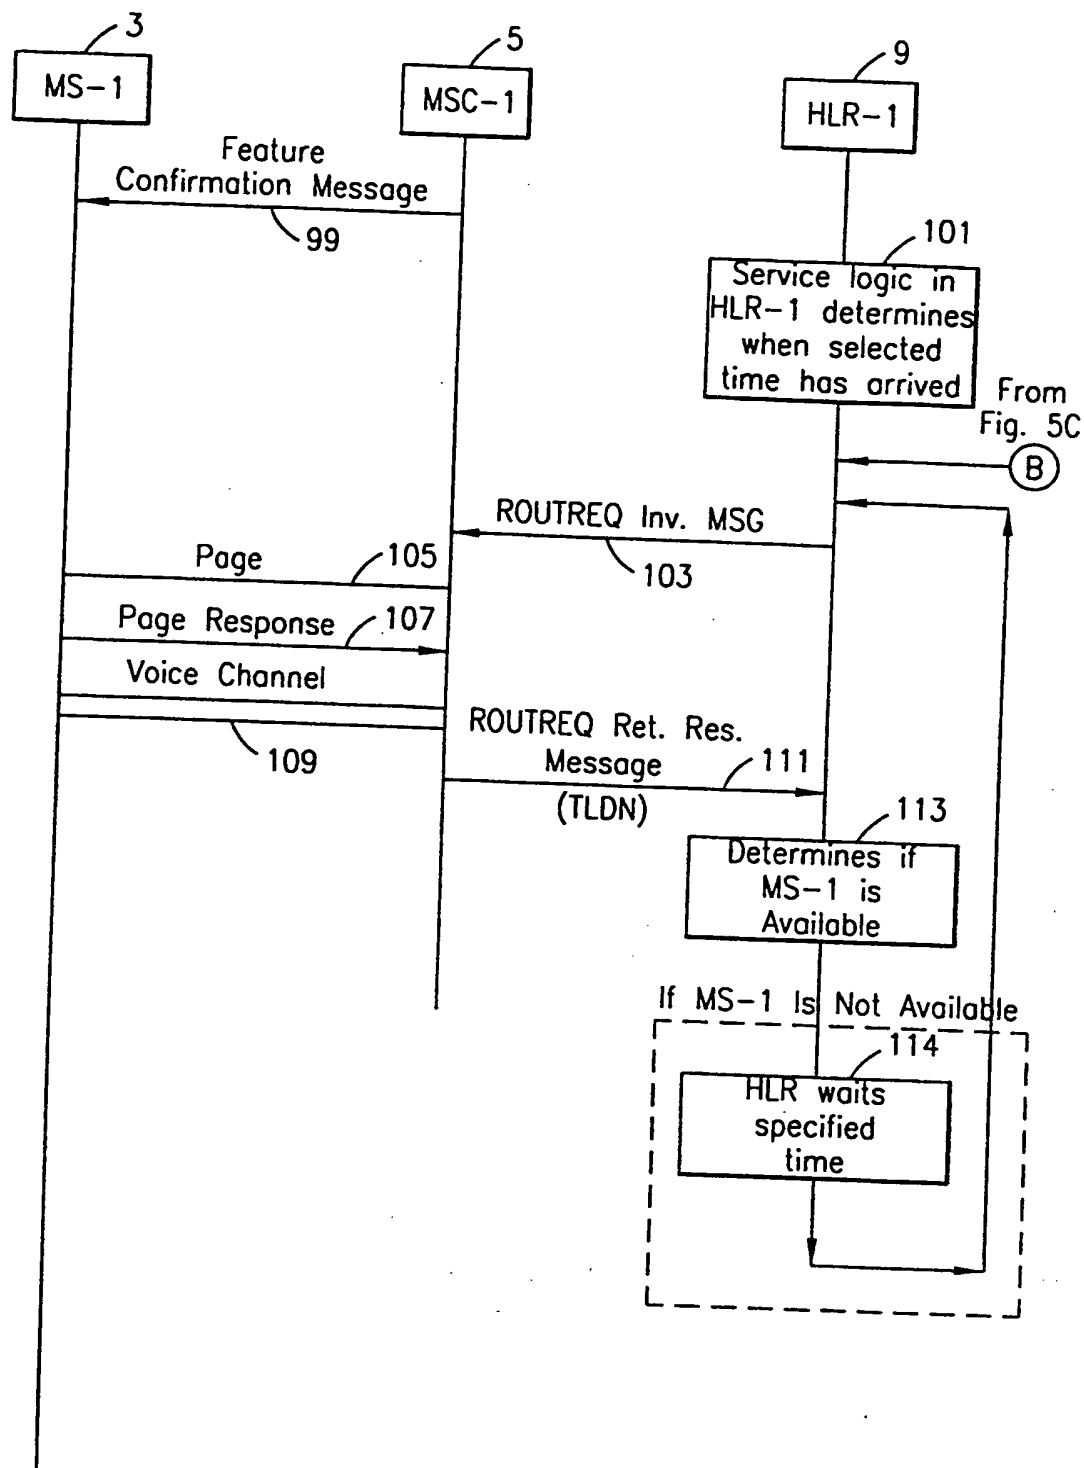


FIG. 5B

7/21

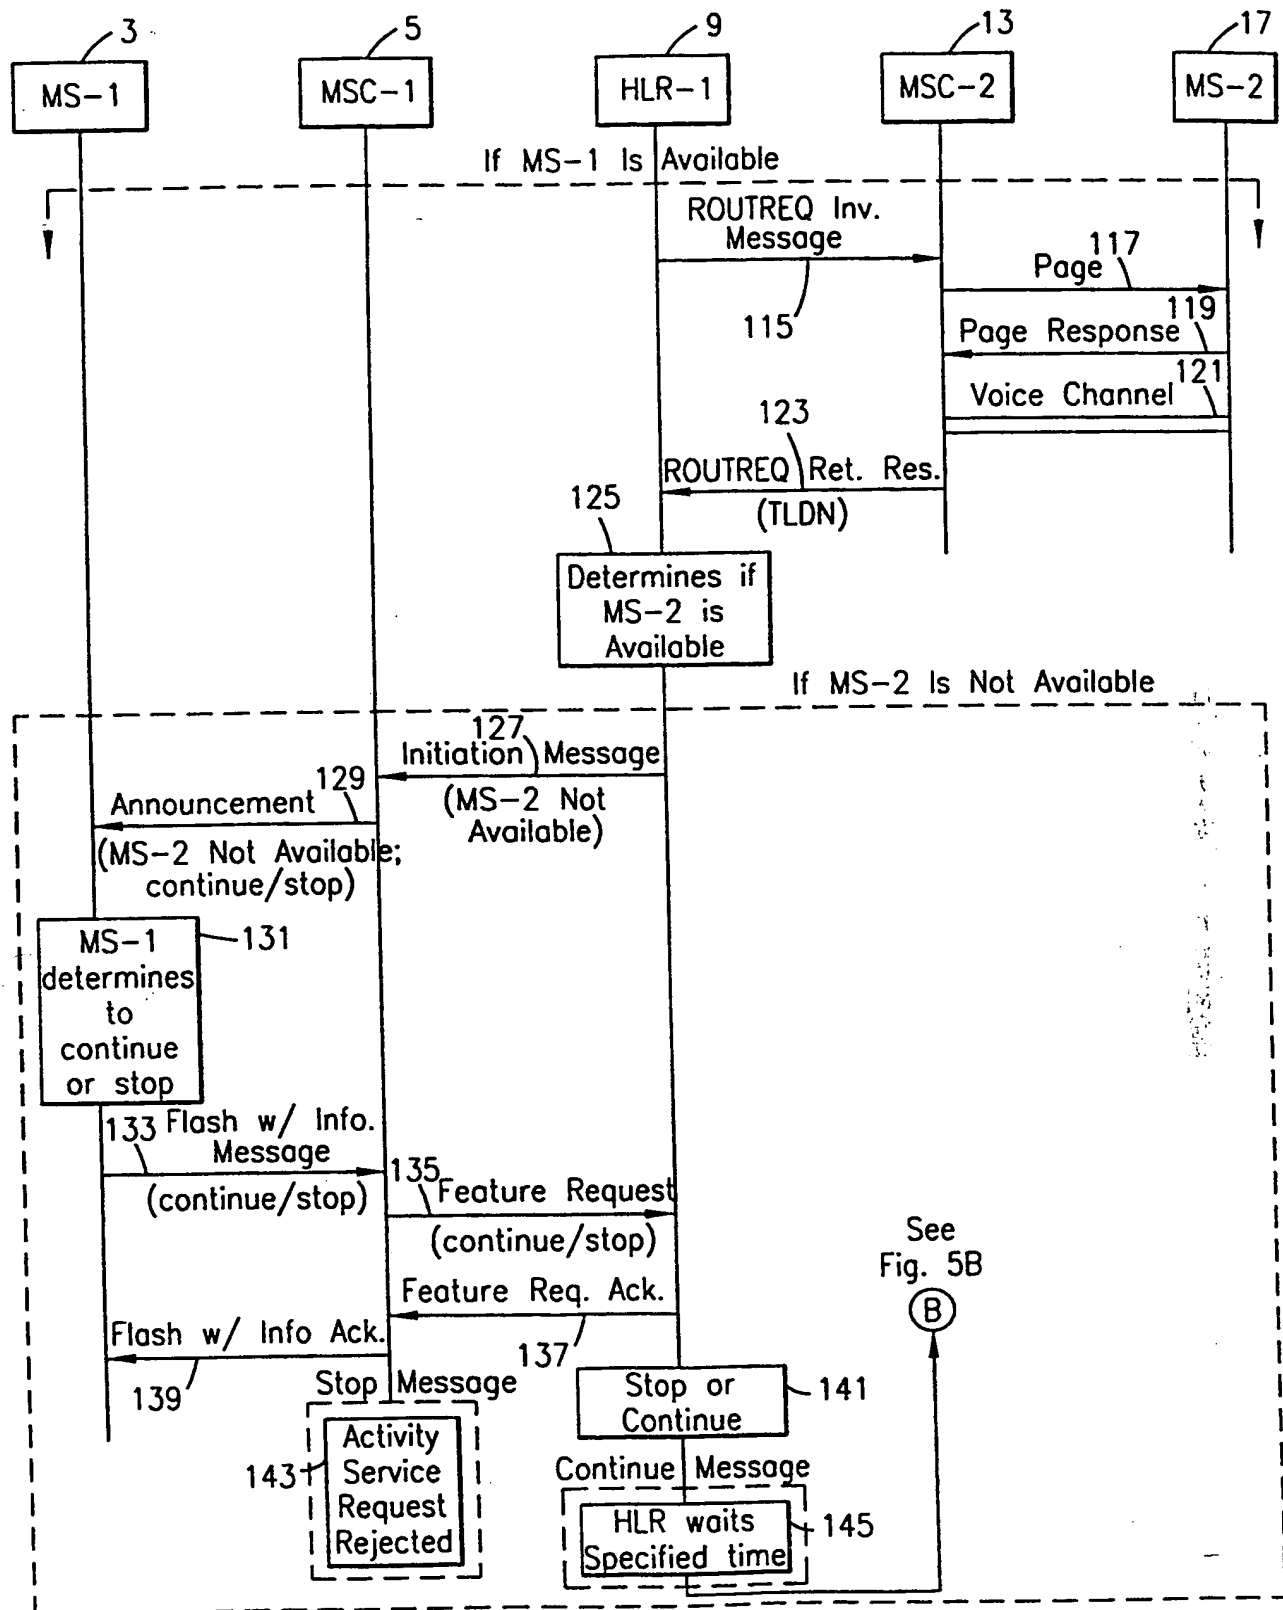
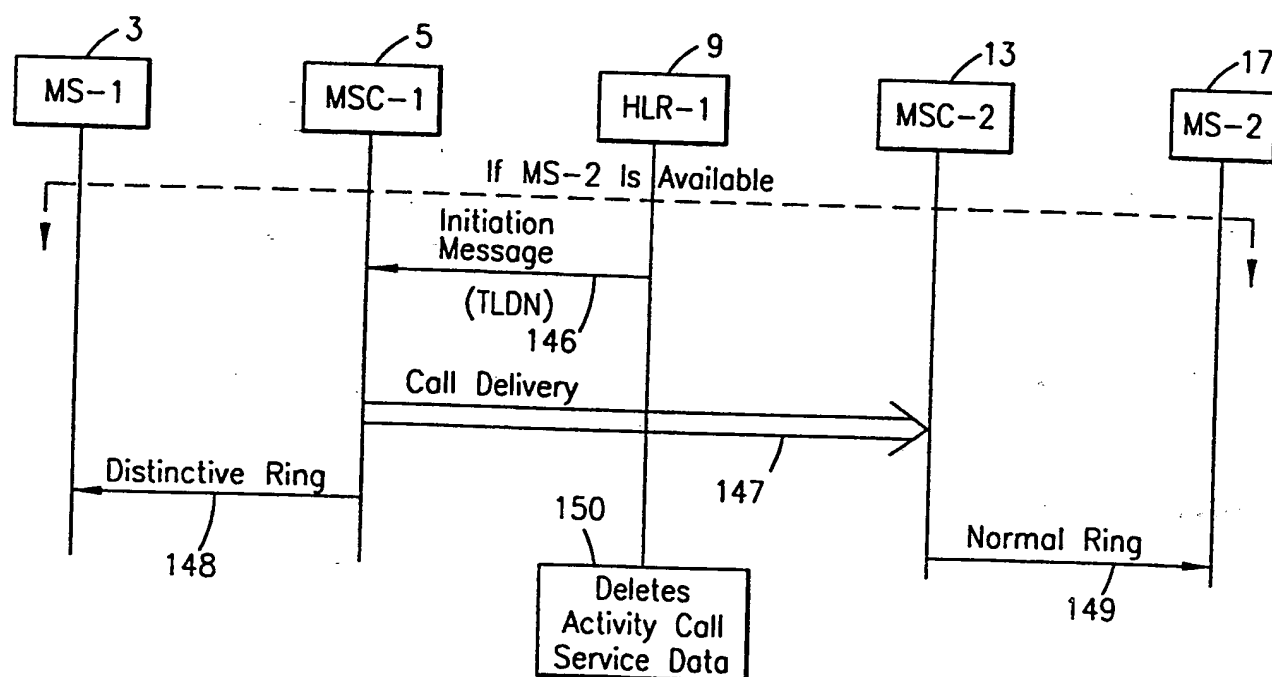
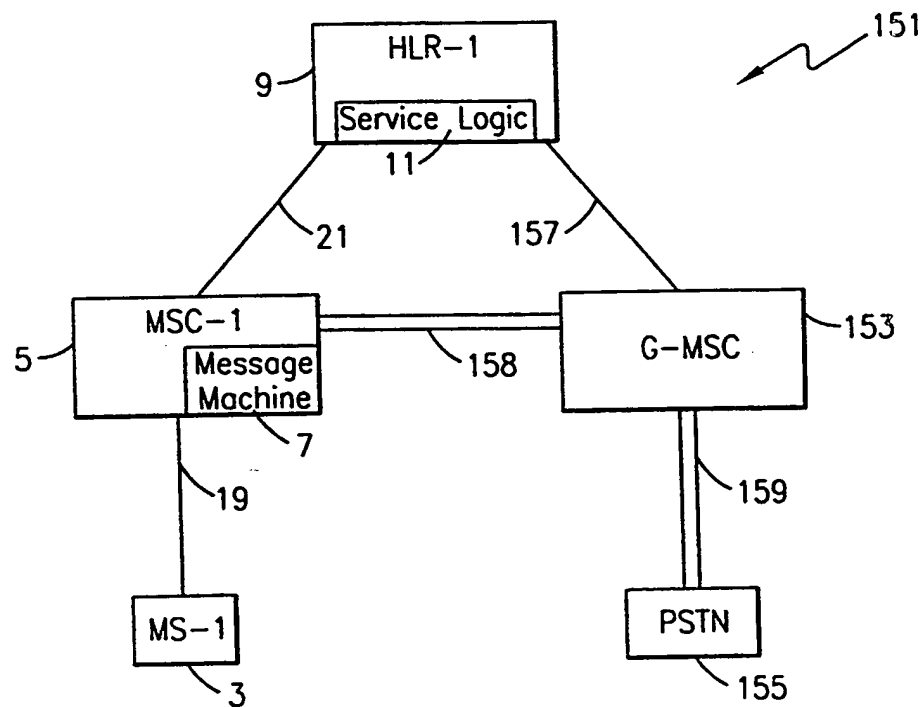


FIG. 5C

8/21

**FIG. 5D**

9/21

**FIG. 6**

10/21

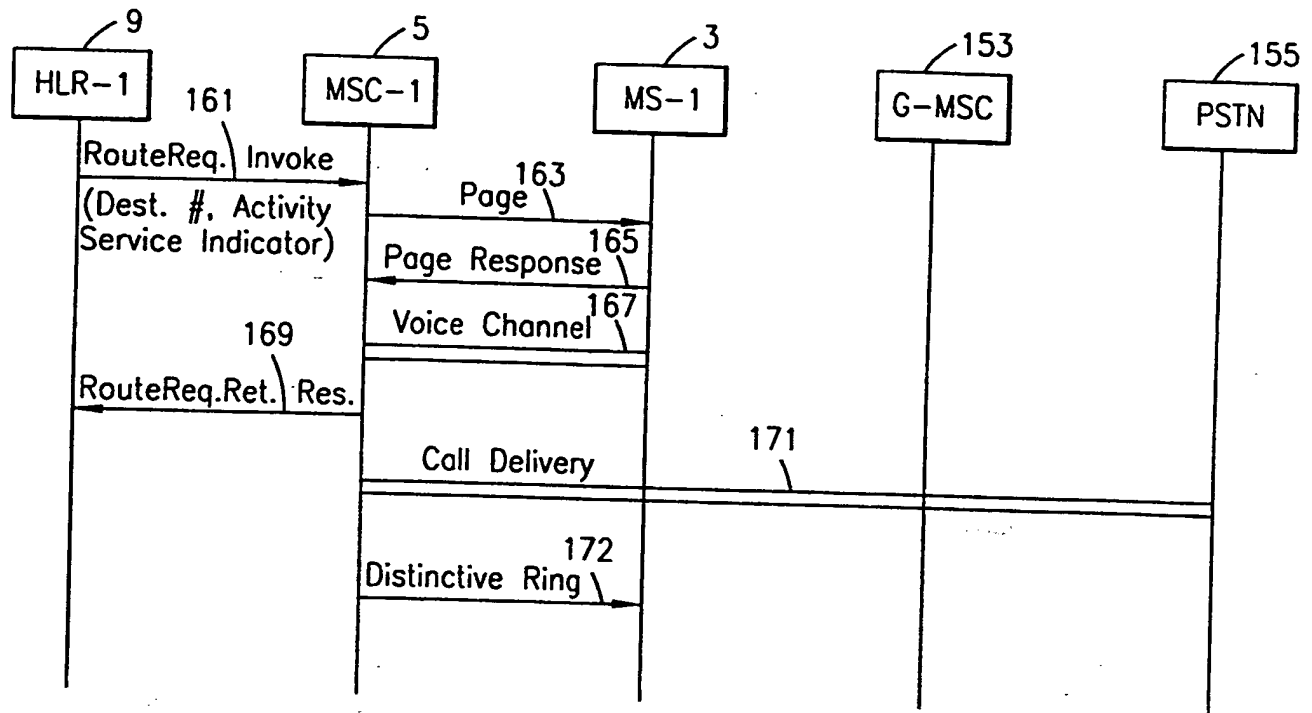


FIG. 7

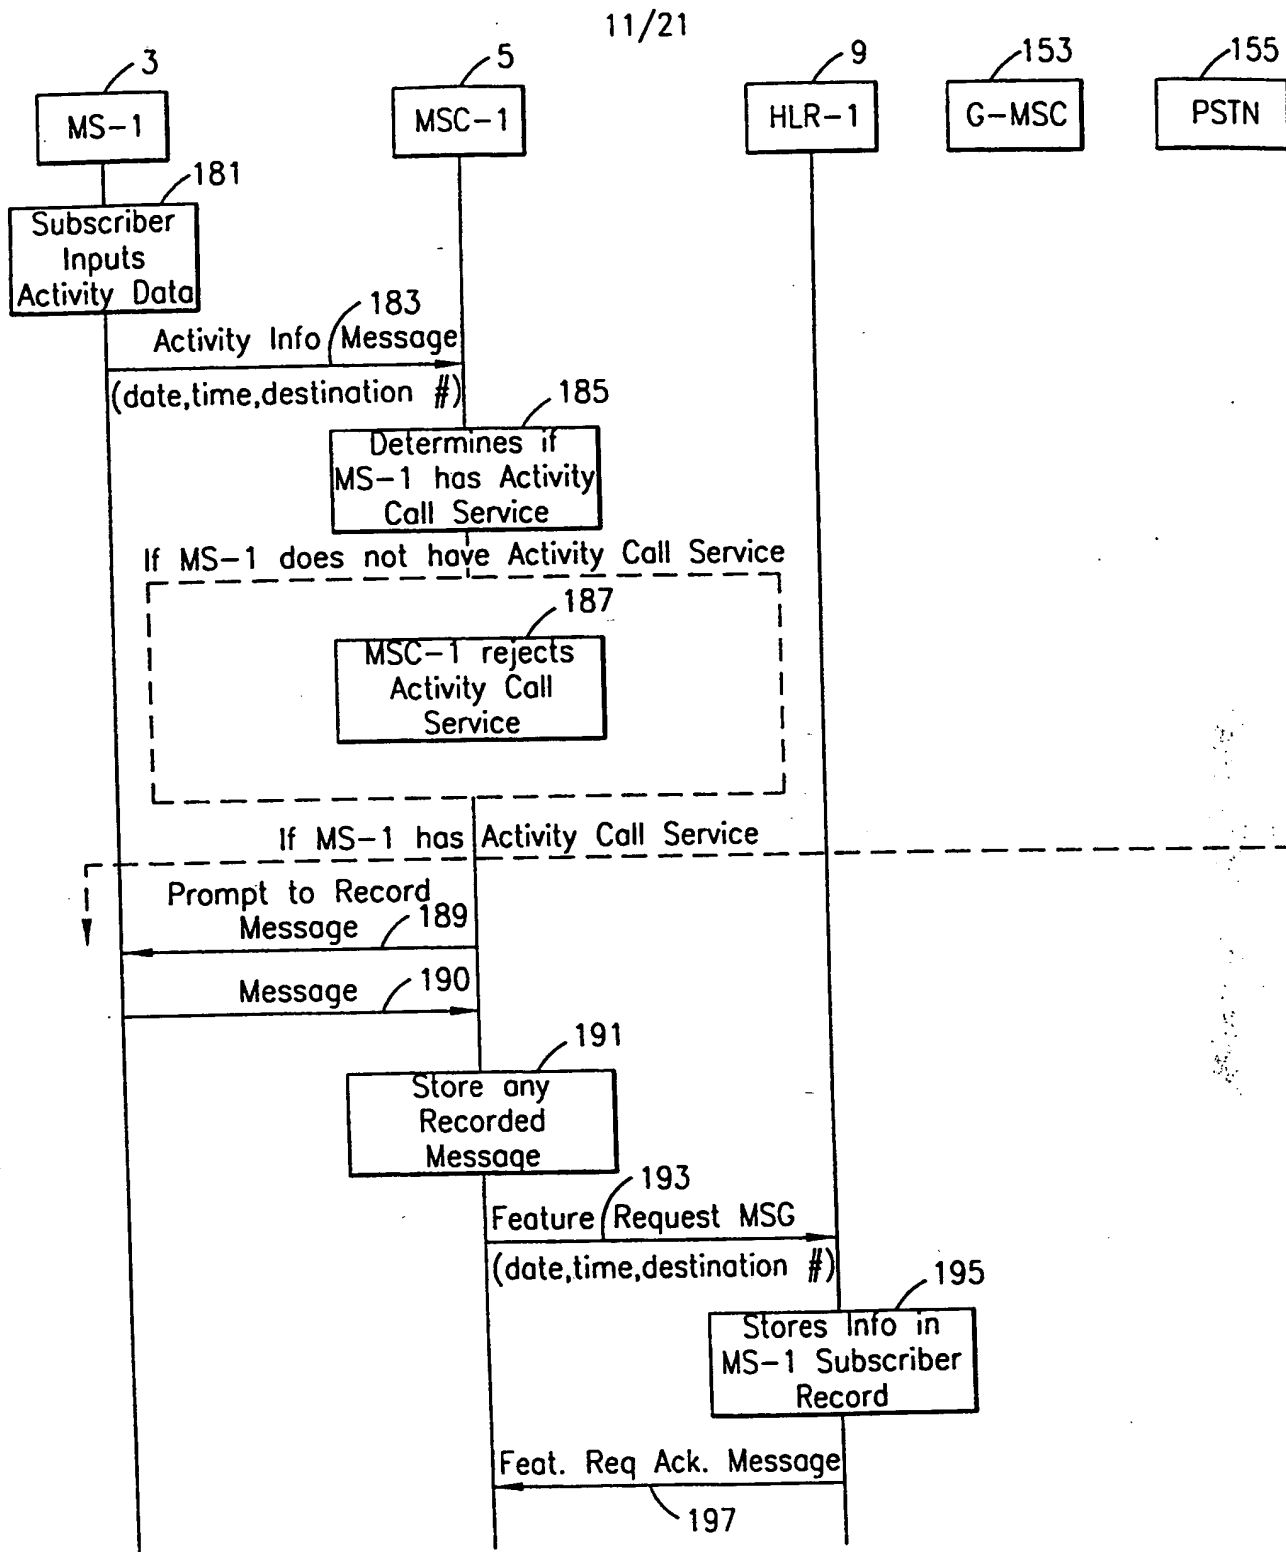


FIG. 8A

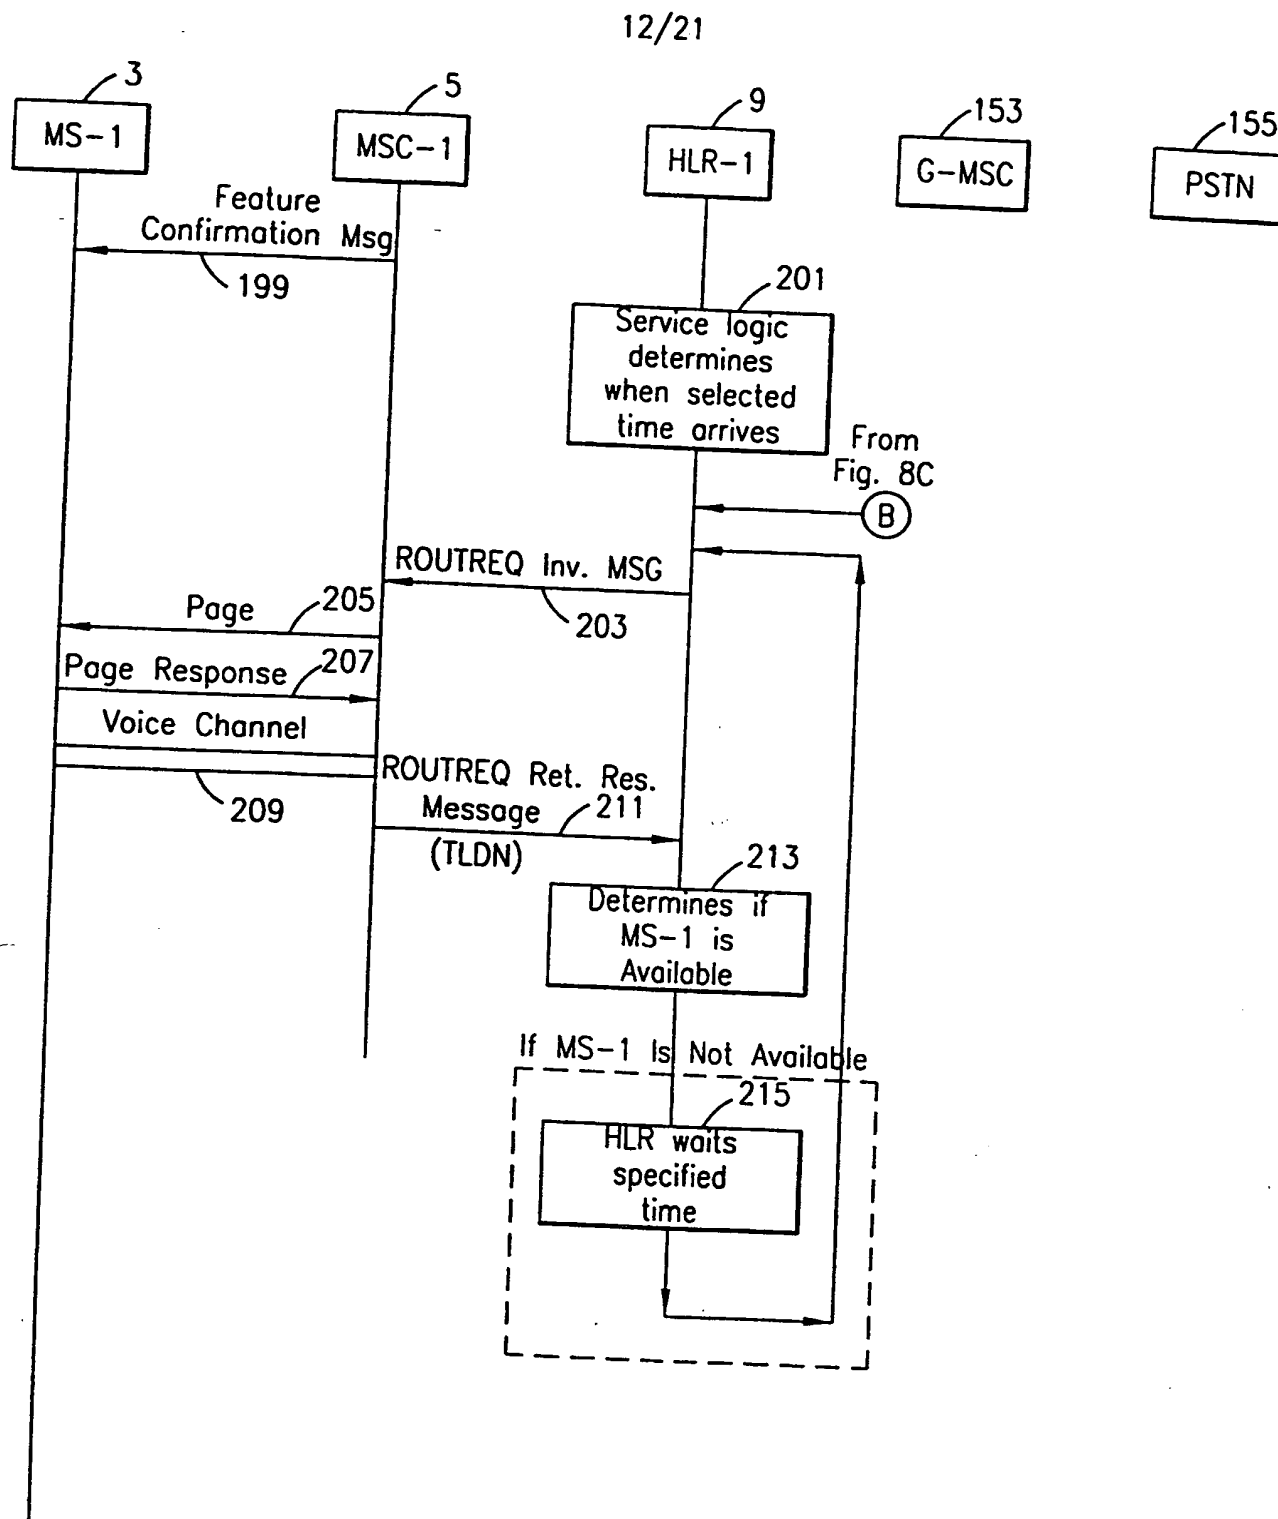


FIG. 8B

13/21

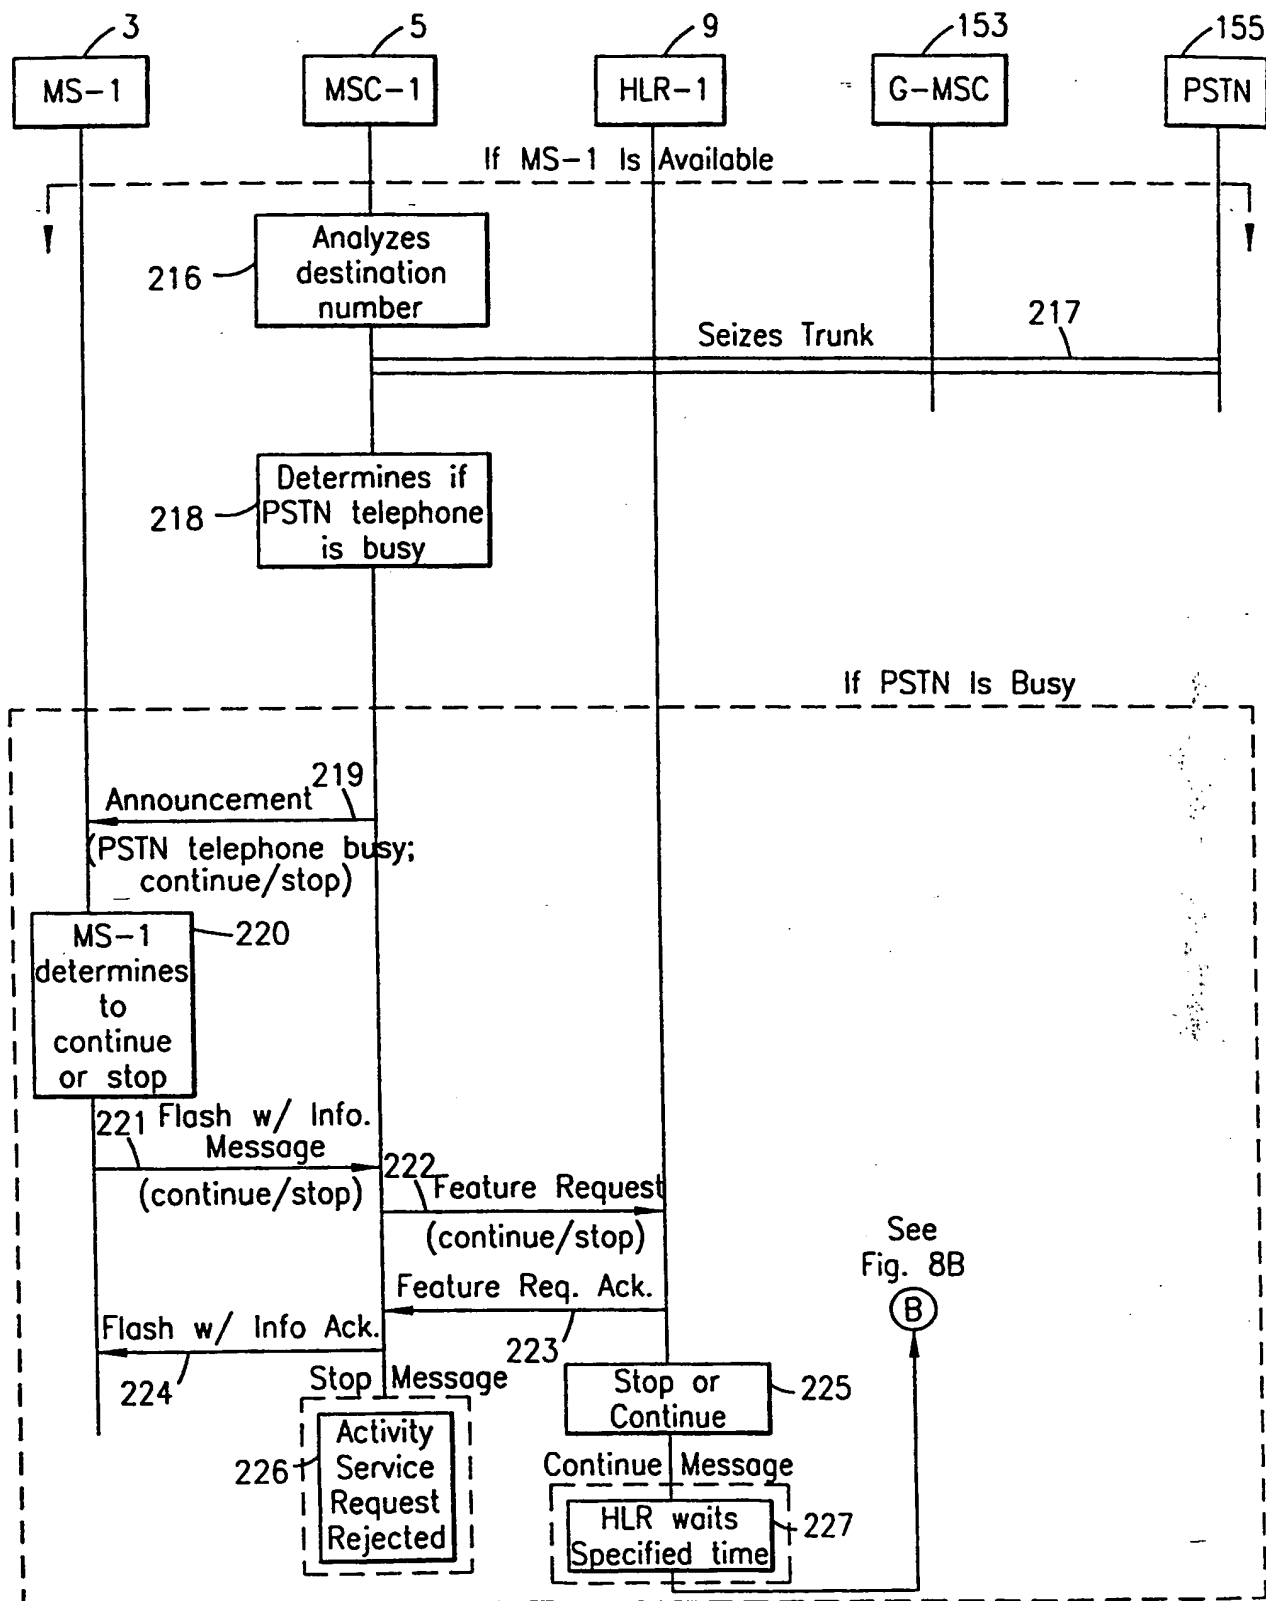
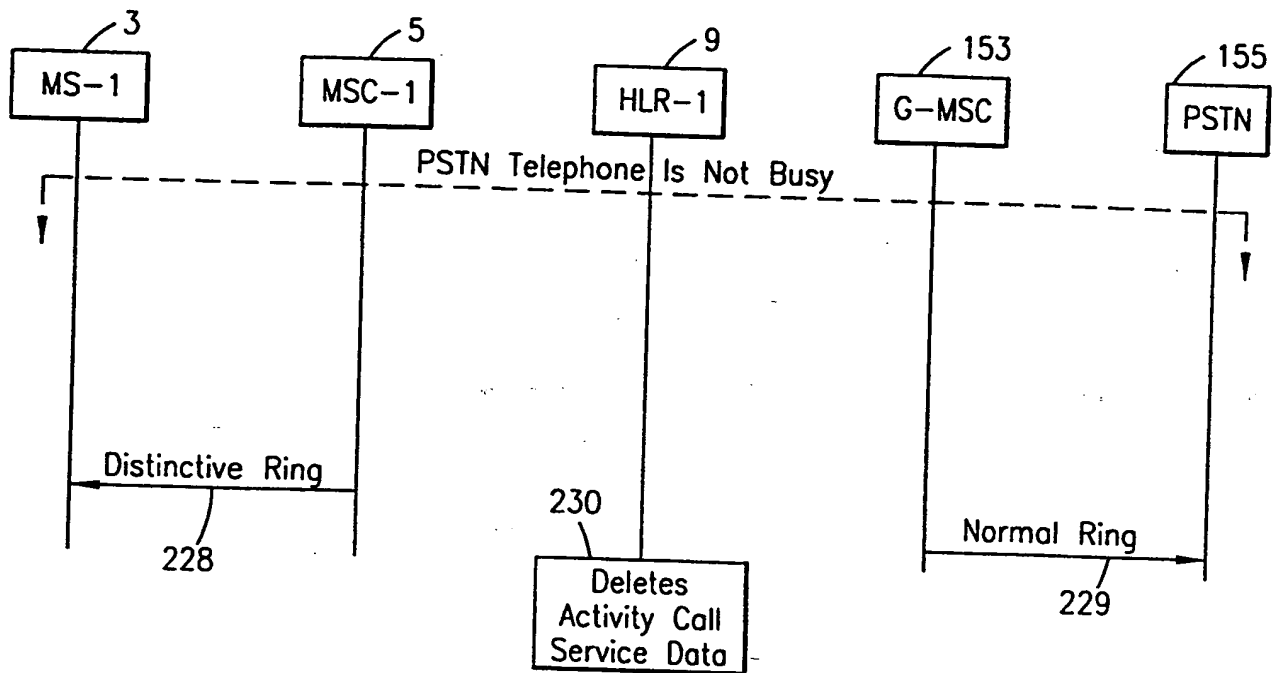
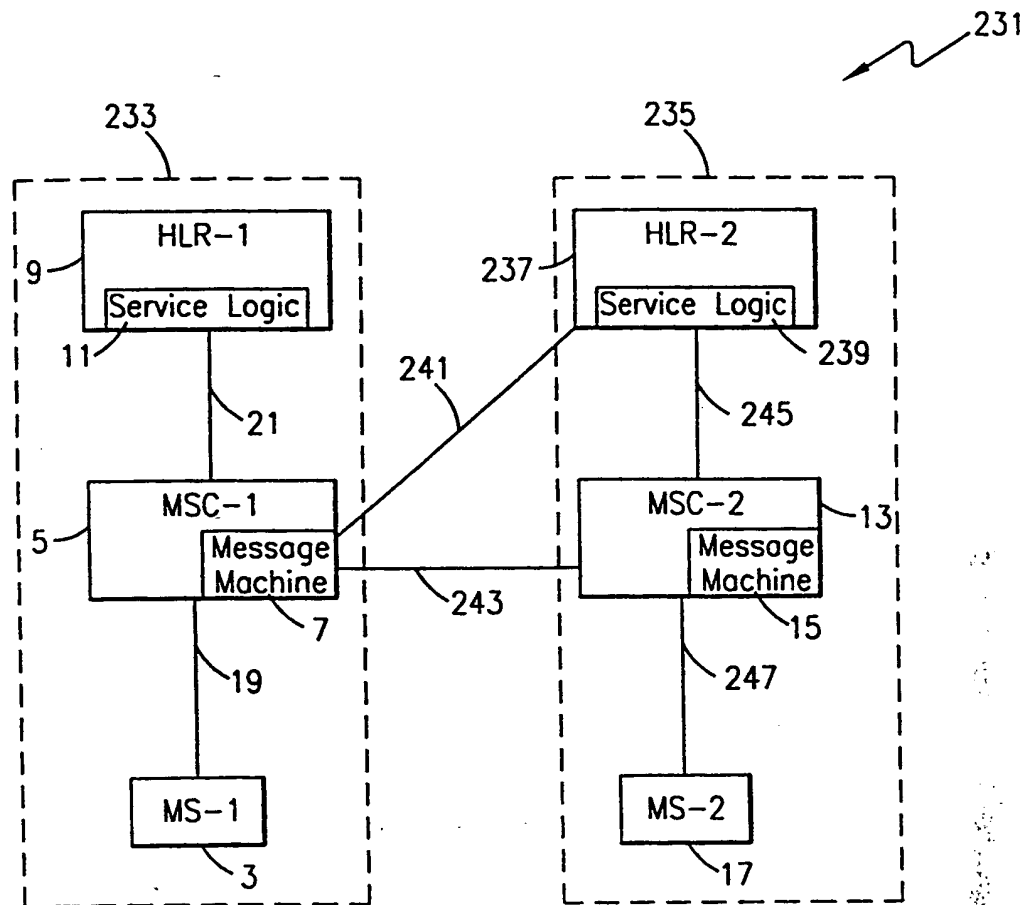


FIG. 8C

14/21

**FIG. 8D**

15/21

**FIG. 9**

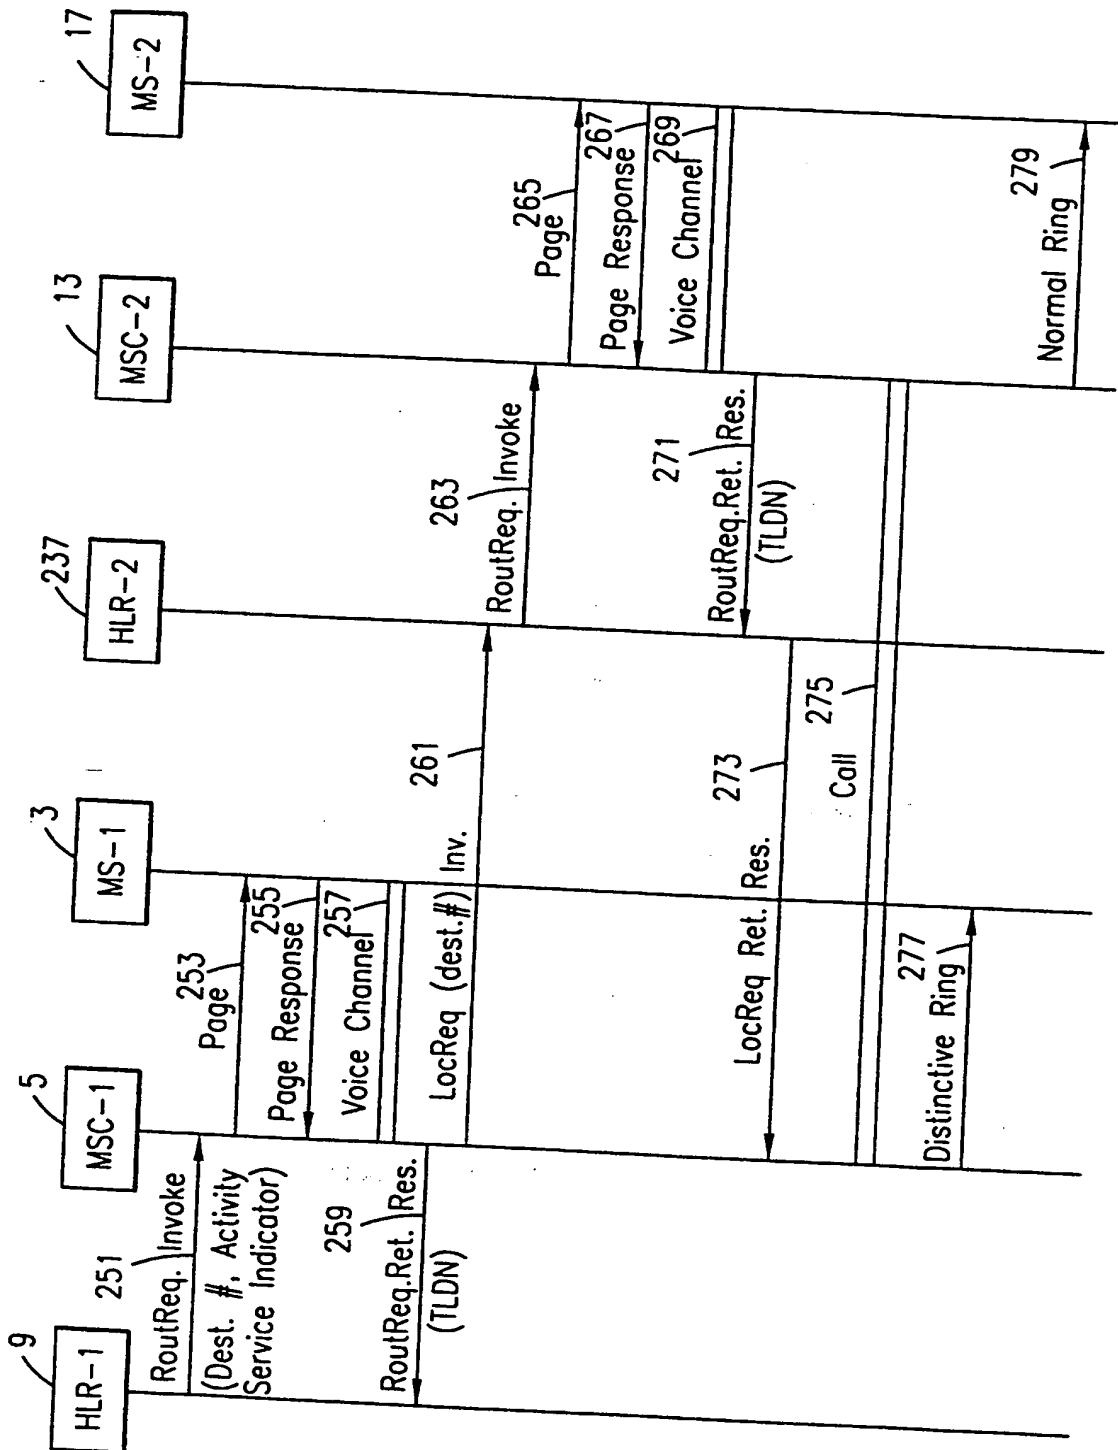


FIG. 10

17/21

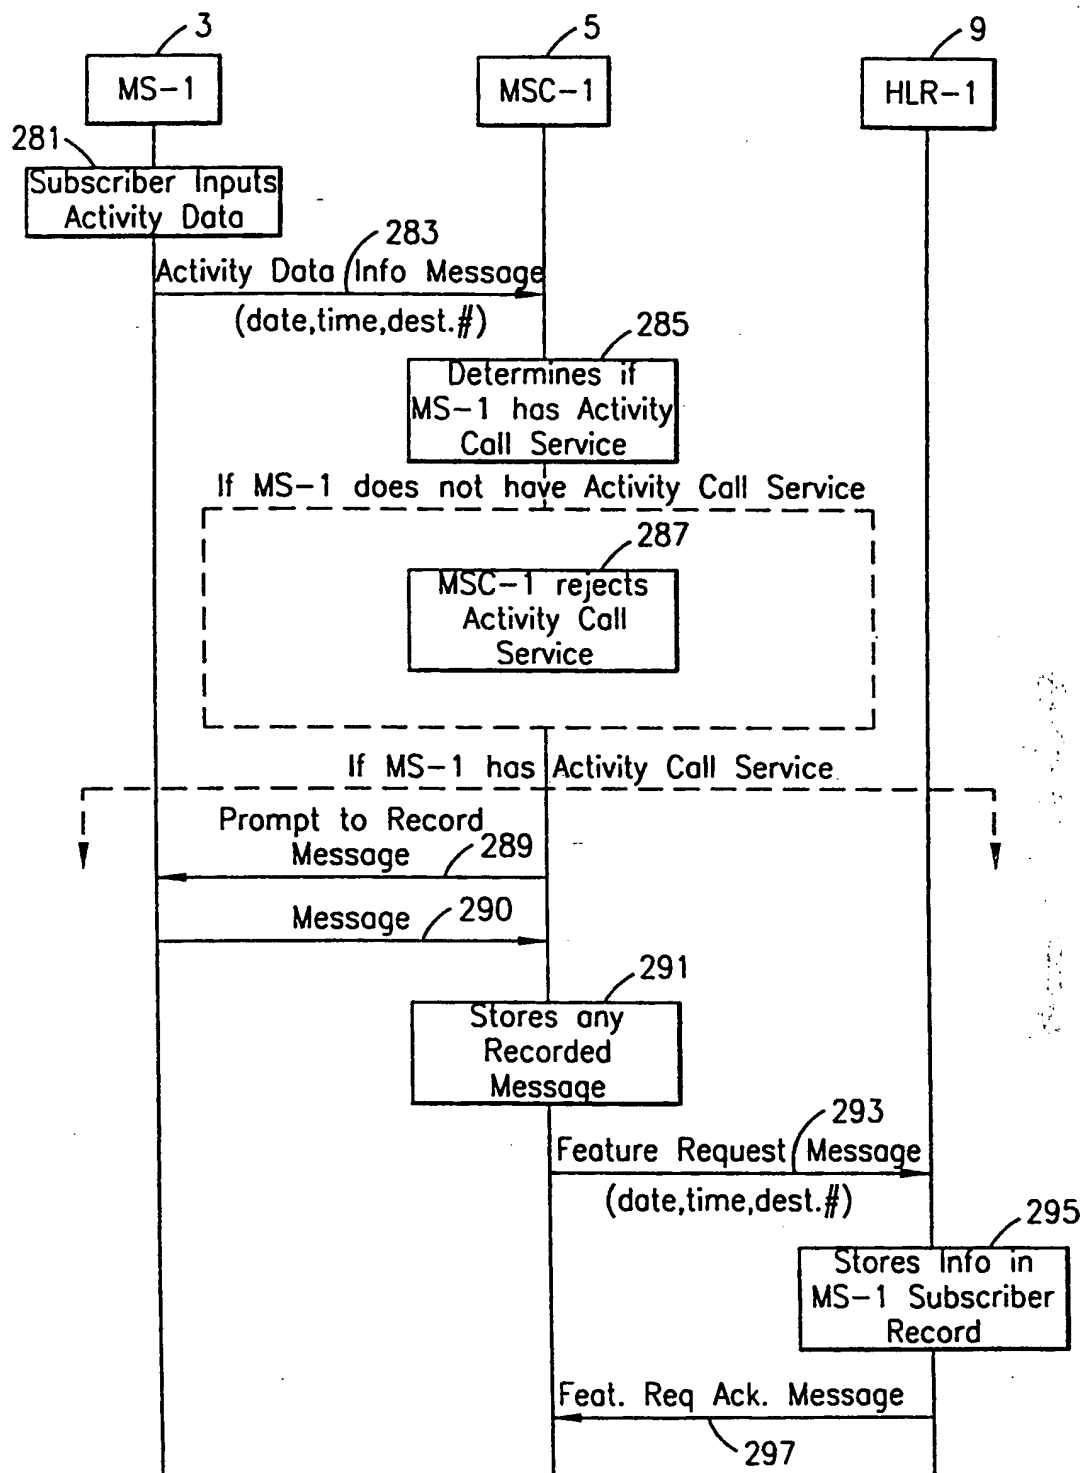


FIG. 11A

18/21

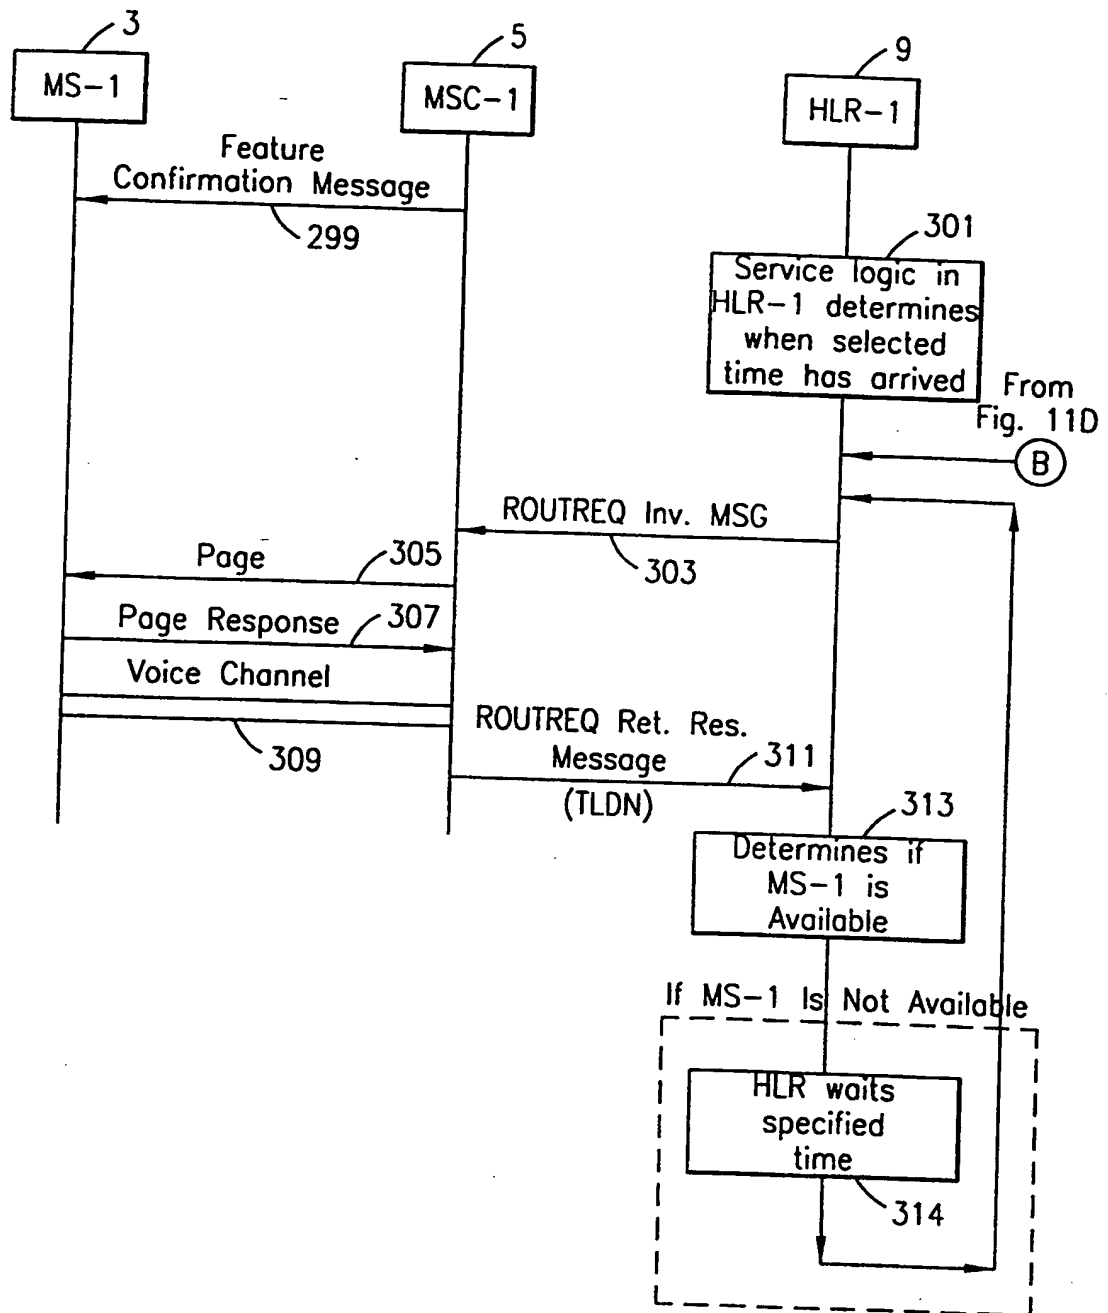


FIG. 11B

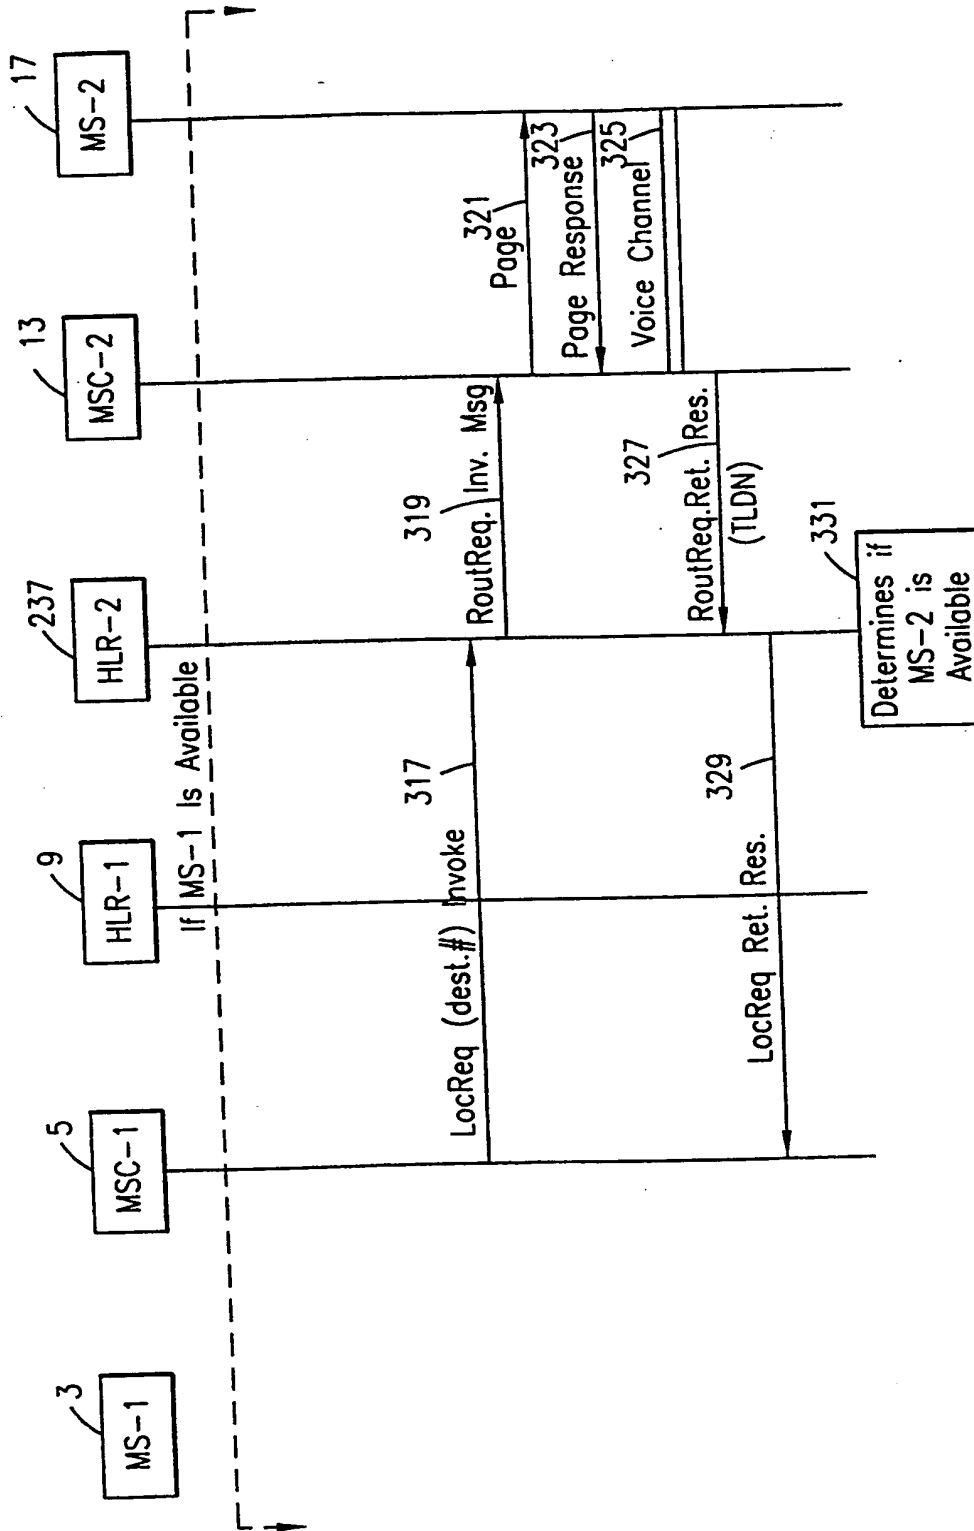
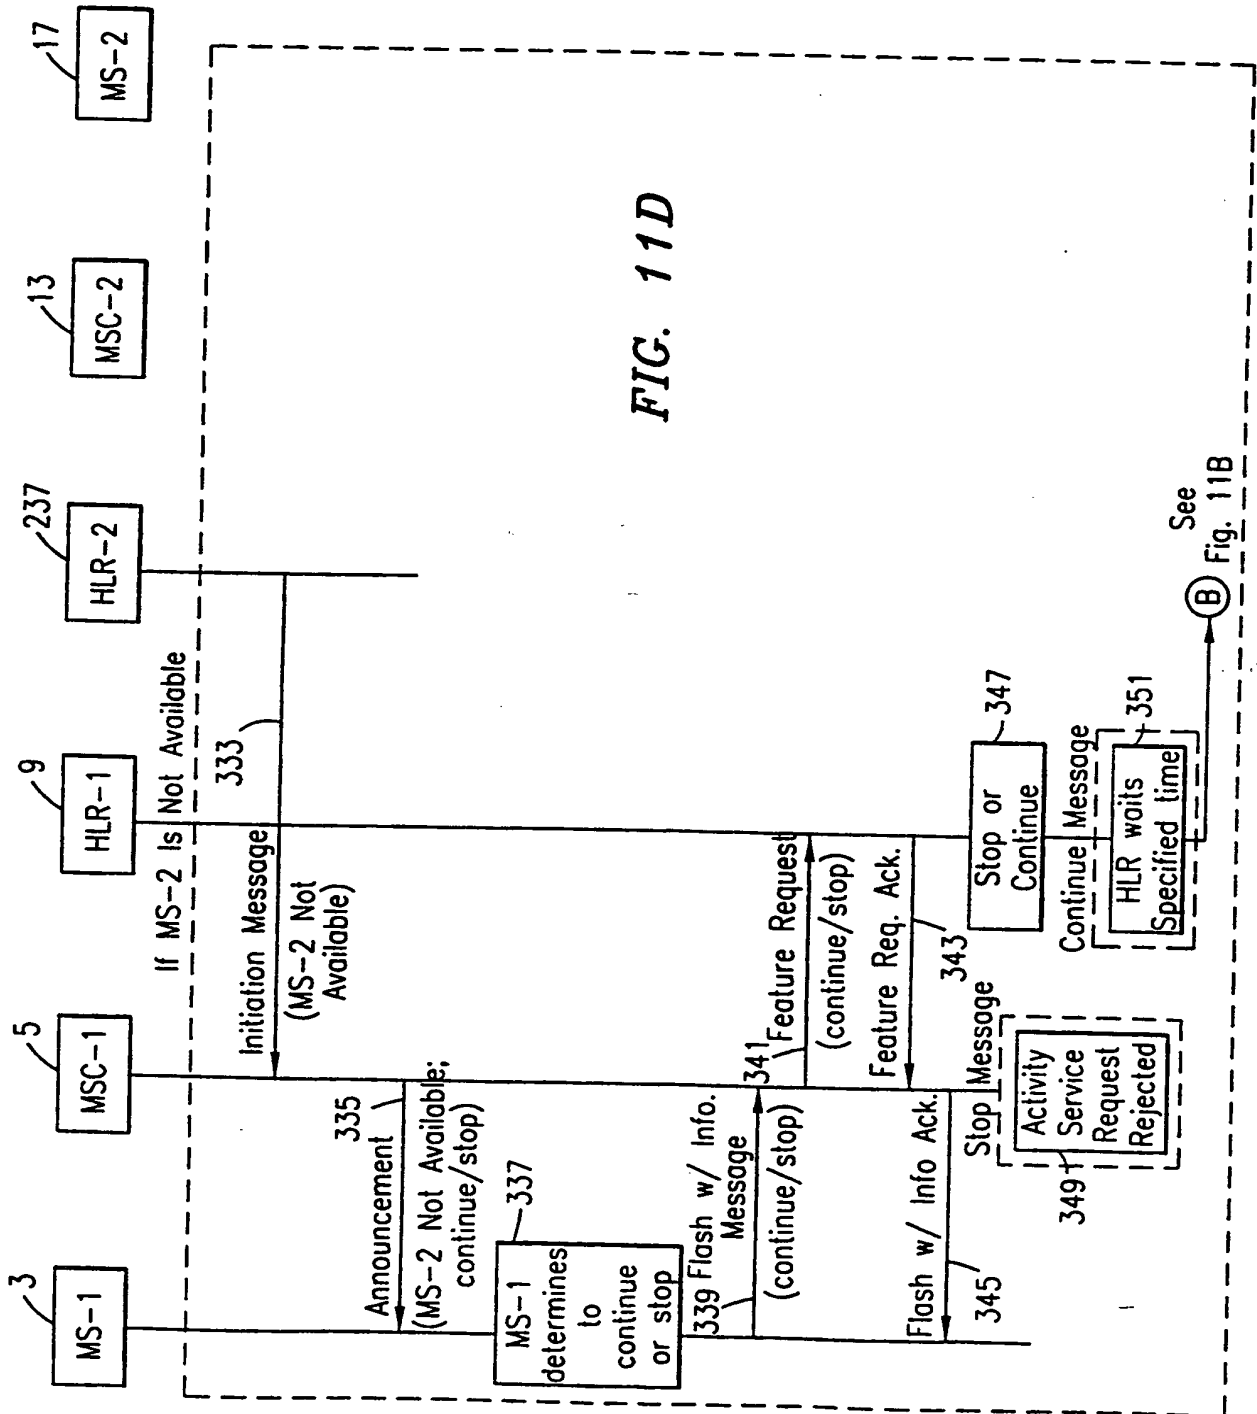


FIG. 11C



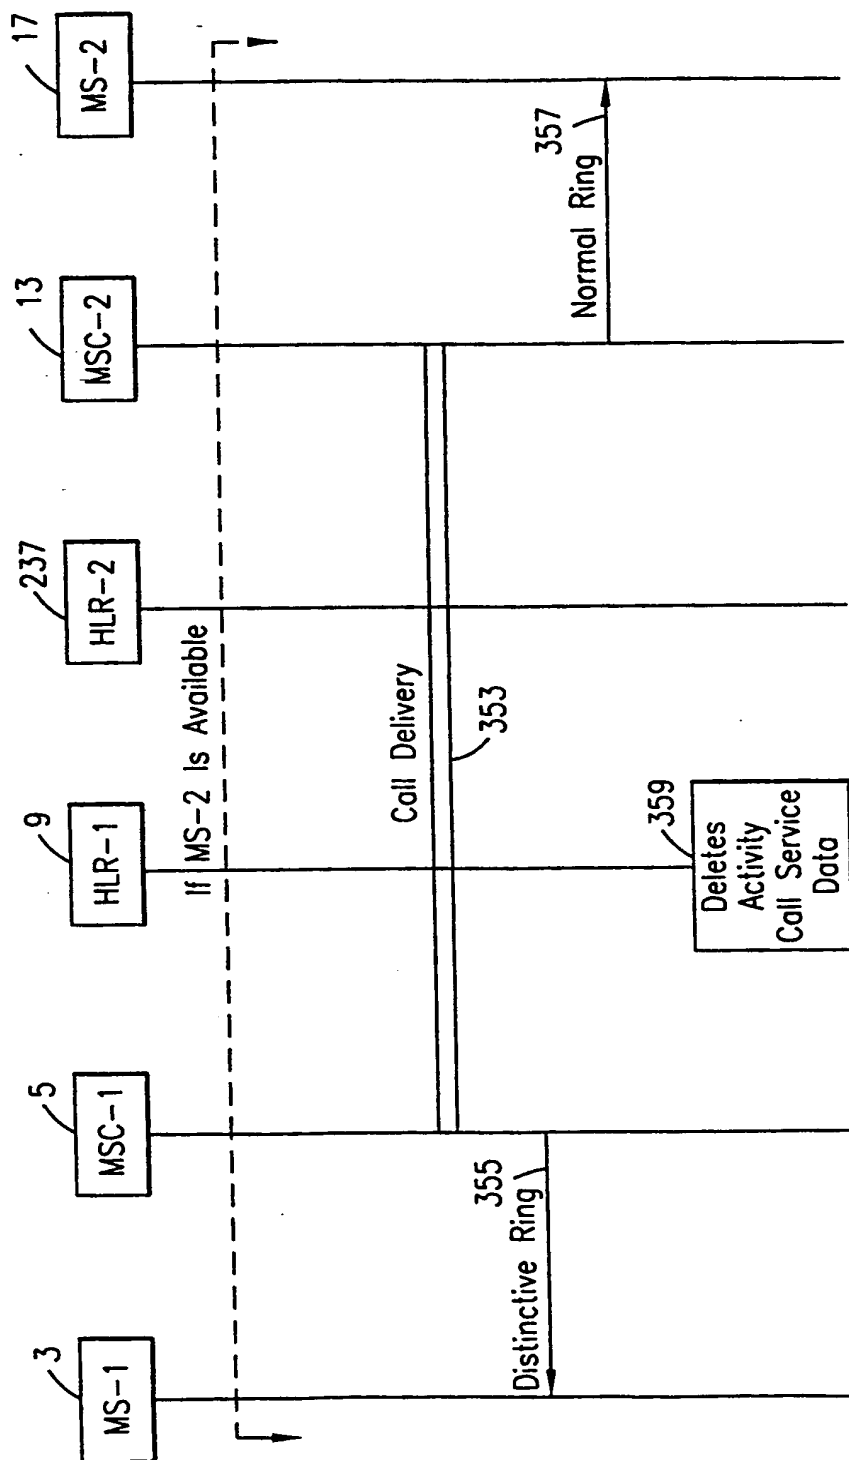


FIG. 11E

INTERNATIONAL SEARCH REPORT

ational Application No

PCT/SE 98/01698

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04Q7/22

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)
IPC 6 H04Q H04M

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category *	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
X A	WO 97 34406 A (BRITISH TELECOMM ; MORLEY MICHAEL CHARLES (GB); WILD DAVID RAYMOND) 18 September 1997 see page 3, line 3 - page 6, line 27	37-41 1, 19, 20, 28, 35, 36
X A	EP 0 435 449 A (AMERICAN TELEPHONE & TELEGRAPH) 3 July 1991 see column 3, line 43 - column 4, line 13 see column 4, line 26 - line 44 see column 5, line 22 - column 6, line 37	37-41 1, 19, 20
A	US 5 406 616 A (BJORND AHL PER S) 11 April 1995 see column 7, line 30 - column 15, line 45	1, 19, 20, 28, 35, 36

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

"A" document defining the general state of the art which is not considered to be of particular relevance

"E" earlier document but published on or after the international filing date

"L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)

"O" document referring to an oral disclosure, use, exhibition or other means

"P" document published prior to the international filing date but later than the priority date claimed

"T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

"X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

"Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

"&" document member of the same patent family

Date of the actual completion of the international search

10 December 1998

Date of mailing of the international search report

17/12/1998

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 2
NL - 2280 HV Rijswijk
Tel. (+31-70) 340-2040, Tx. 31 651 epo nl,
Fax: (+31-70) 340-3016

Authorized officer

Baas, G

INTERNATIONAL SEARCH REPORT

International Application No
PCT/SE 98/01698

C.(Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US 5 224 146 A (TANAKA MASAYUKI ET AL) 29 June 1993 cited in the application -----	
P,X	WO 98 32270 A (ERICSSON GE MOBILE INC) 23 July 1998 see page 3, line 24 - page 7, line 12 see page 8, line 24 - page 9, line 3 see page 9, line 30 - page 10, line 19 -----	37-41

INTERNATIONAL SEARCH REPORT

Information on patent family members

International Application No

PCT/SE 98/01698

Patent document cited in search report		Publication date	Patent family member(s)	Publication date
WO 9734406	A	18-09-1997	AU 2103597 A	01-10-1997
EP 0435449	A	03-07-1991	US 4969185 A	06-11-1990
			CA 2024311 C	15-02-1994
			CA 2024311 A	30-06-1991
			DE 69025578 D	04-04-1996
			DE 69025578 T	26-09-1996
			JP 2665044 B	22-10-1997
			JP 3222560 A	01-10-1991
			SG 44349 A	19-12-1997
US 5406616	A	11-04-1995	SE 470578 B	19-09-1994
			AT 171034 T	15-09-1998
			AU 674733 B	09-01-1997
			AU 6047394 A	29-08-1994
			CA 2131891 A	18-08-1994
			CN 1094878 A	09-11-1994
			DE 69413149 D	15-10-1998
			EP 0635191 A	25-01-1995
			FI 944627 A	04-10-1994
			JP 2813466 B	22-10-1998
			JP 7505754 T	22-06-1995
			NZ 261642 A	26-07-1996
			SE 9300367 A	06-08-1994
			WO 9418805 A	18-08-1994
			SG 43098 A	17-10-1997
US 5224146	A	29-06-1993	JP 3220954 A	30-09-1991
			KR 9411236 B	29-11-1994
WO 9832270	A	23-07-1998	AU 5735998 A	07-08-1998